

Report No.: 52.08011 ECO Down Light

Test Time: 2023-07-03 11:31

Luminaire Property

Luminaire Category: Bridgelux V6HD 3000K CRI90

Luminaire Description: 24D

Current: 0.111 A

Power Factor: 0.600

Voltage: 216.2 V

Power: 14.50 W

Photometric Results

CIE Class: Direct

Measurement Flux: 1067.6 lm

Downward Ratio: 100%

Horizontal Diffuse Angle(50%): H20.2

Vertical Diffuse Angle(50%): V20.2

Luminaire Efficacy Rating (LER): 74

Max. Intensity: 6965.53 cd

Total Rated Lamp Lumens: 1067.6 lm


Efficiency: 100%

Upward Ratio: 0%


Central Intensity: 6965.53 cd

Pos of Max. Intensity: H0 V0

Picture Of Luminaire



Luminous Intensity Distribution Curve

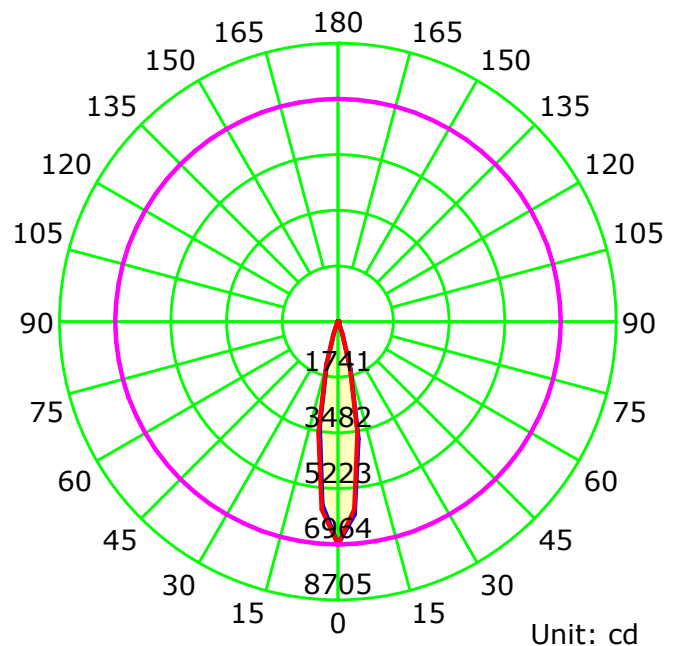

— C0-C180 — C90-C270 — G0

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0



Test Device: CHL-6E

Distance: 3.000 m

Humidity:

Inspector:


Luminous Intensity Distribution Curve

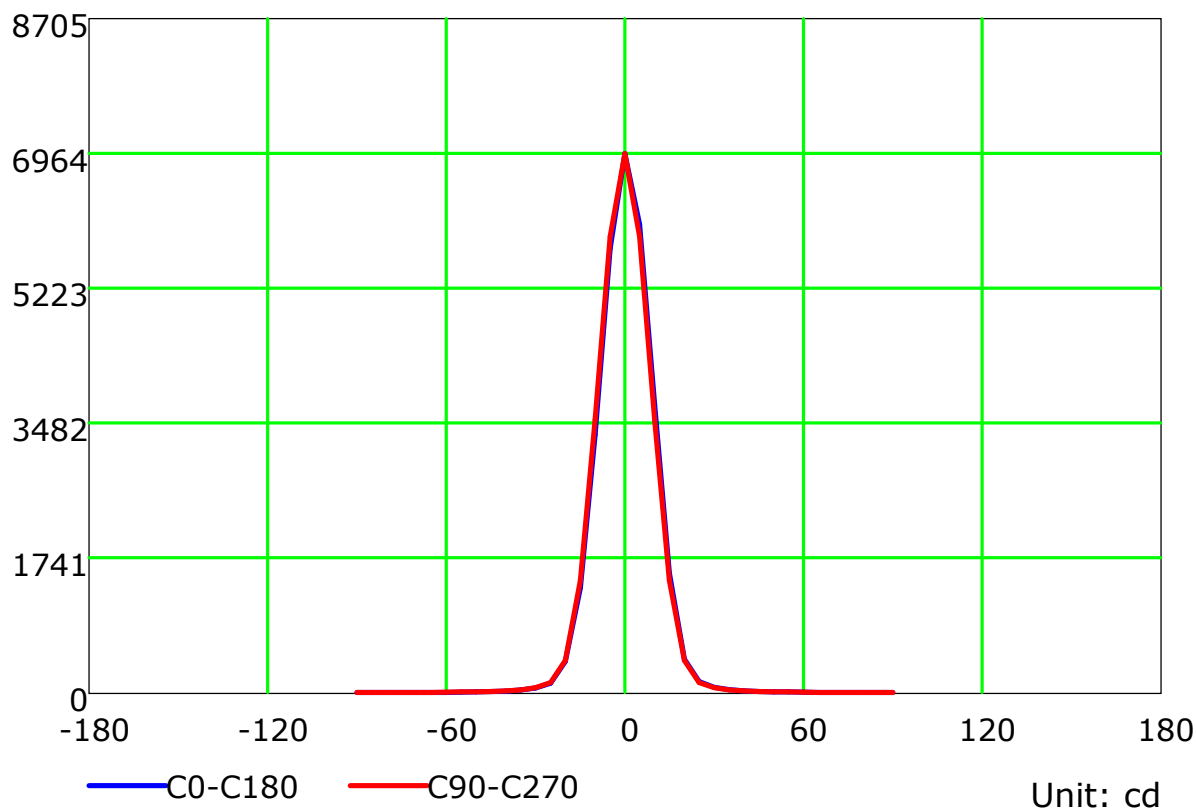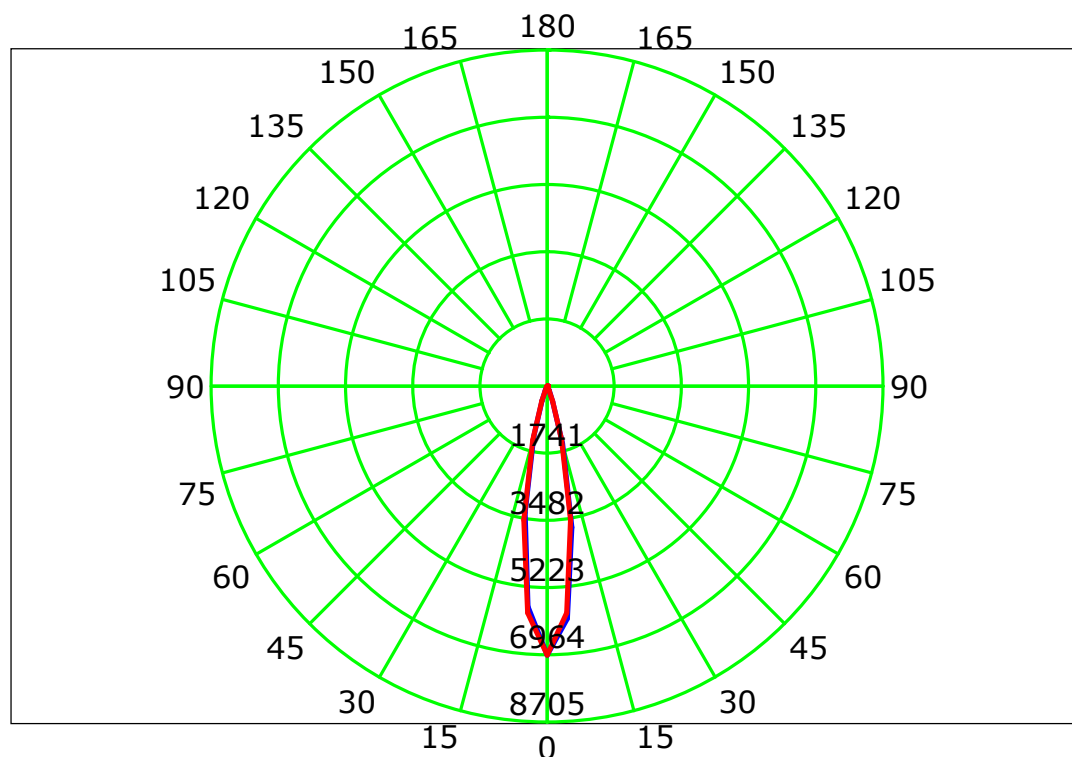

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:5.0
Test Device: CHL-6E
Distance: 3.000 m
Humidity:
Inspector:

Isocandela (rectangle)

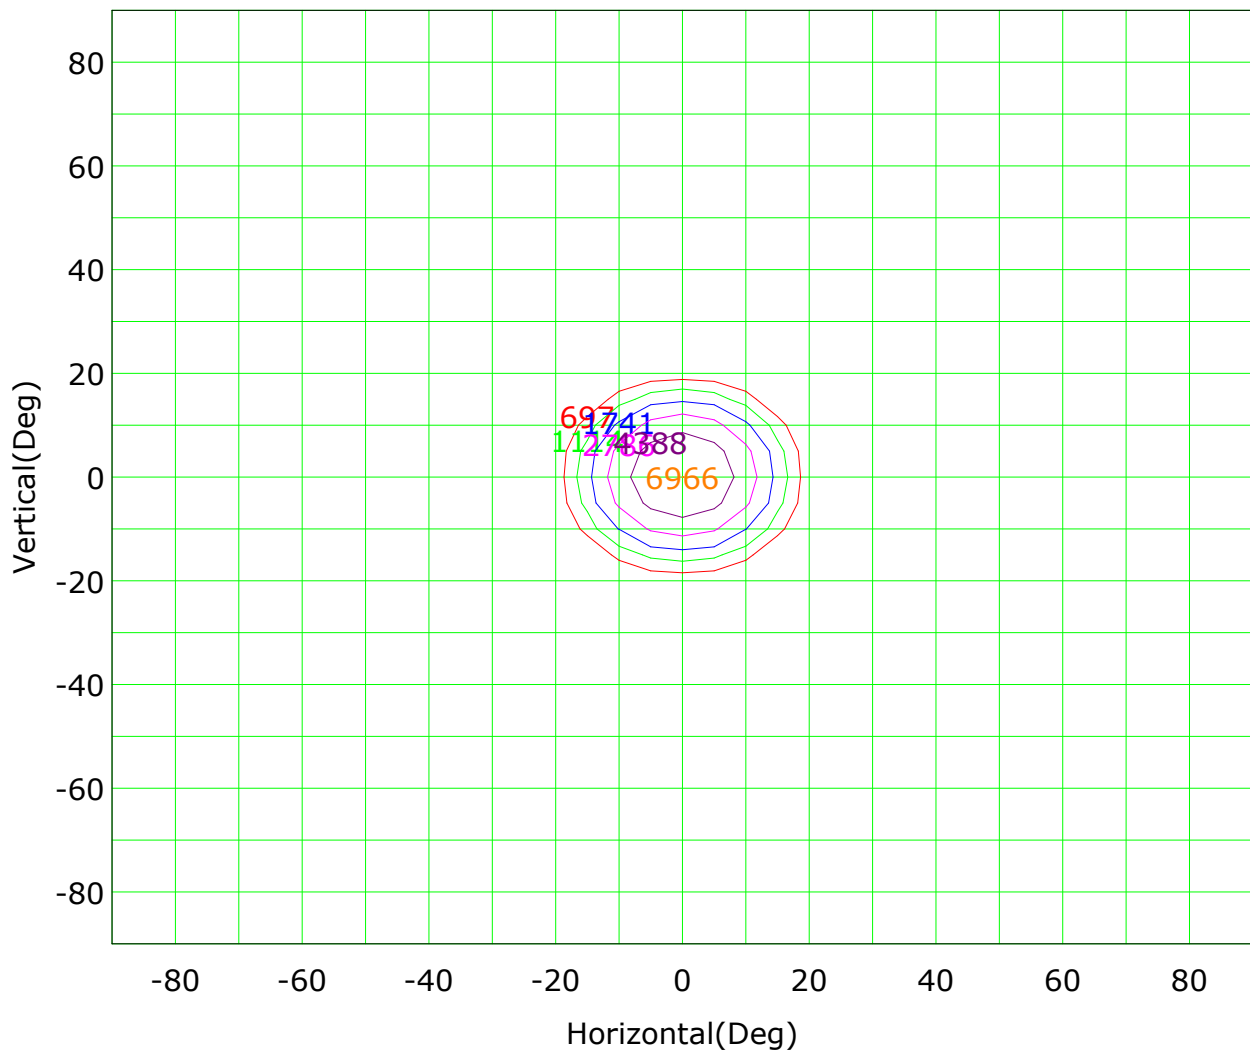

Imax (100%): 6966 cd

(10%): 697 cd	(16%): 1114 cd
(25%): 1741 cd	(40%): 2786 cd
(63%): 4388 cd	(100%): 6966 cd

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0


Test Device: CHL-6E

Distance: 3.000 m

Humidity:

Inspector:

IsoLux Plot

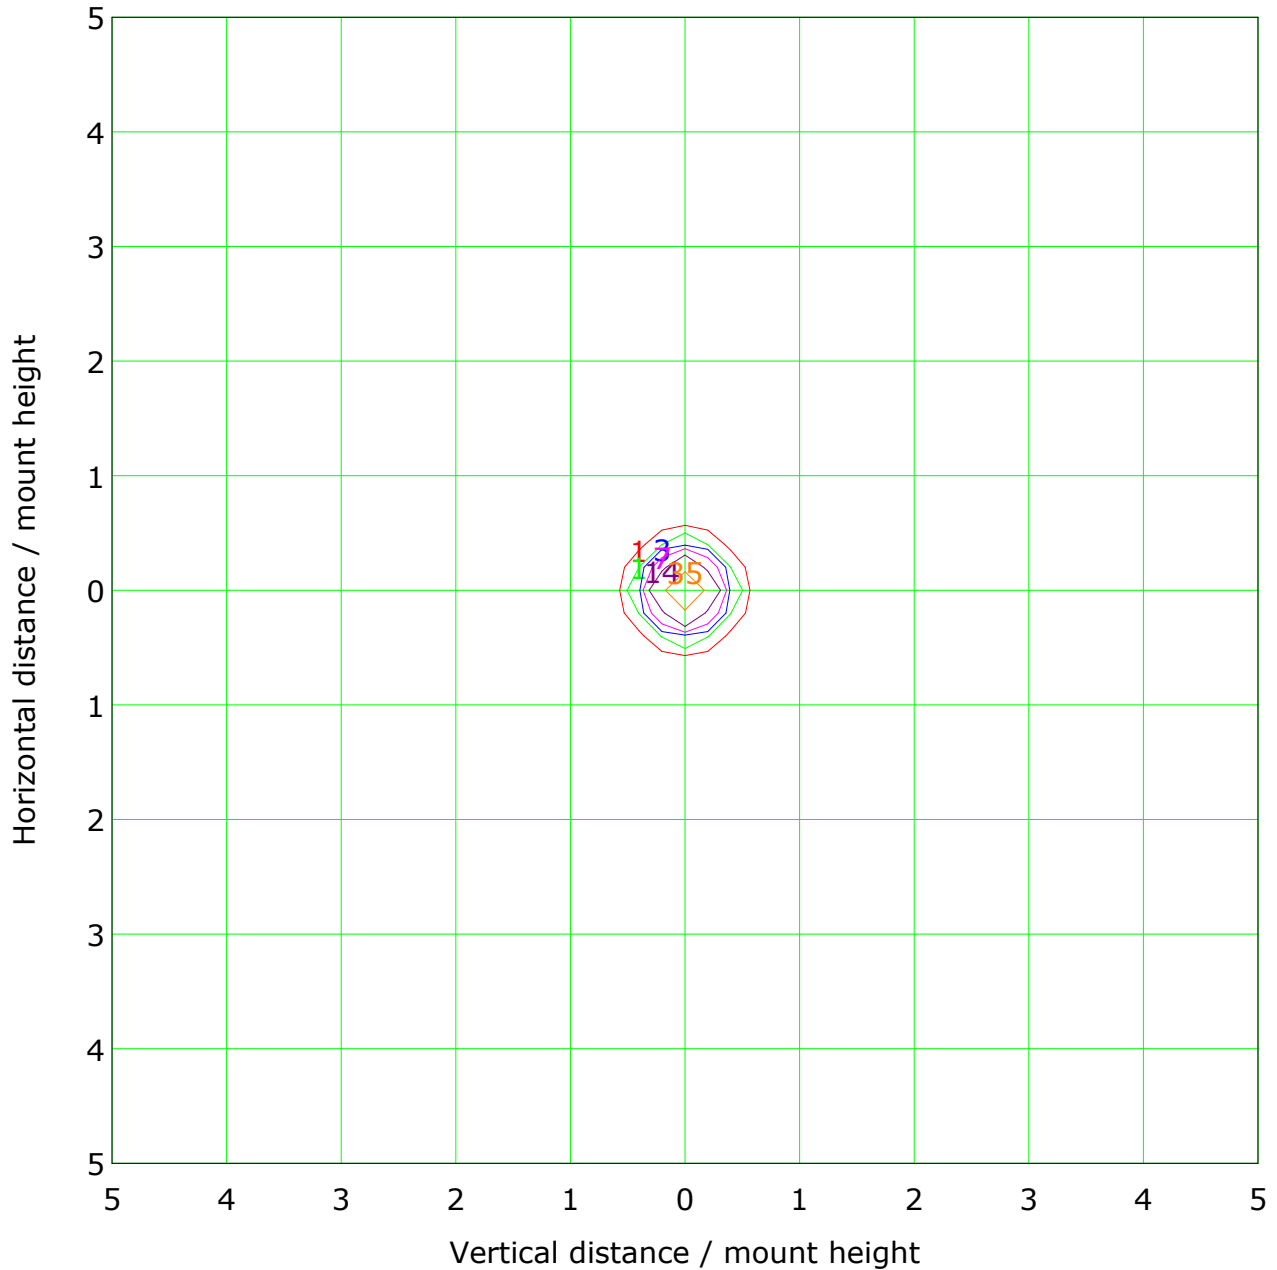

Mounting Height: 10m Max Lux(100%): 70 lx			
— (1%):	1 lx	— (2%):	1 lx
— (5%):	3 lx	— (10%):	7 lx
— (20%):	14 lx	— (50%):	35 lx
— (100%):	70 lx		

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0


Test Device: CHL-6E

Distance: 3.000 m


Humidity:

Inspector:

Illuminance at a Distance

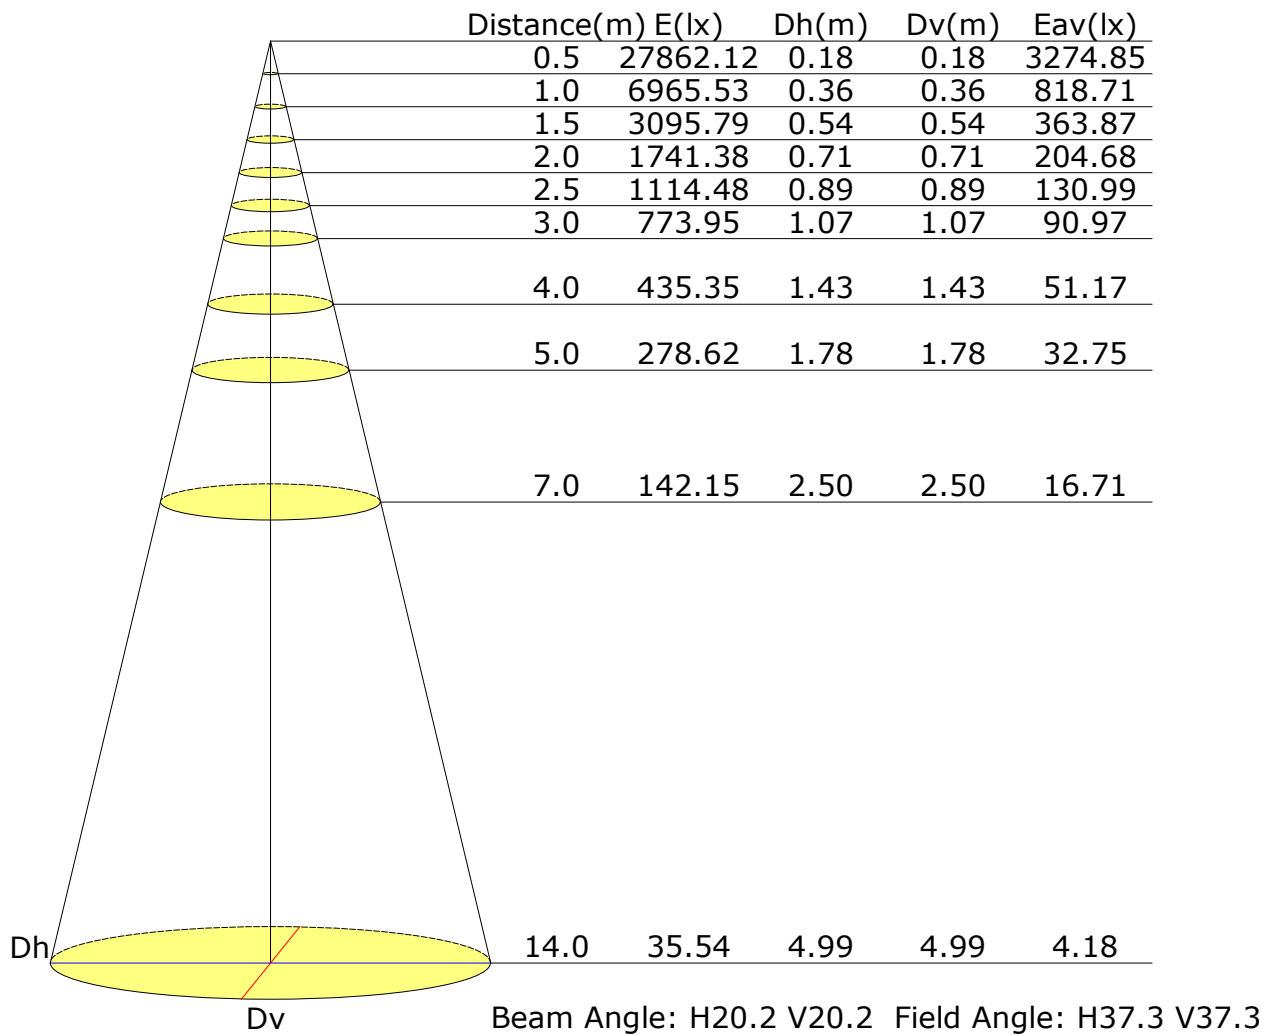

Vertical IsoLux Plot

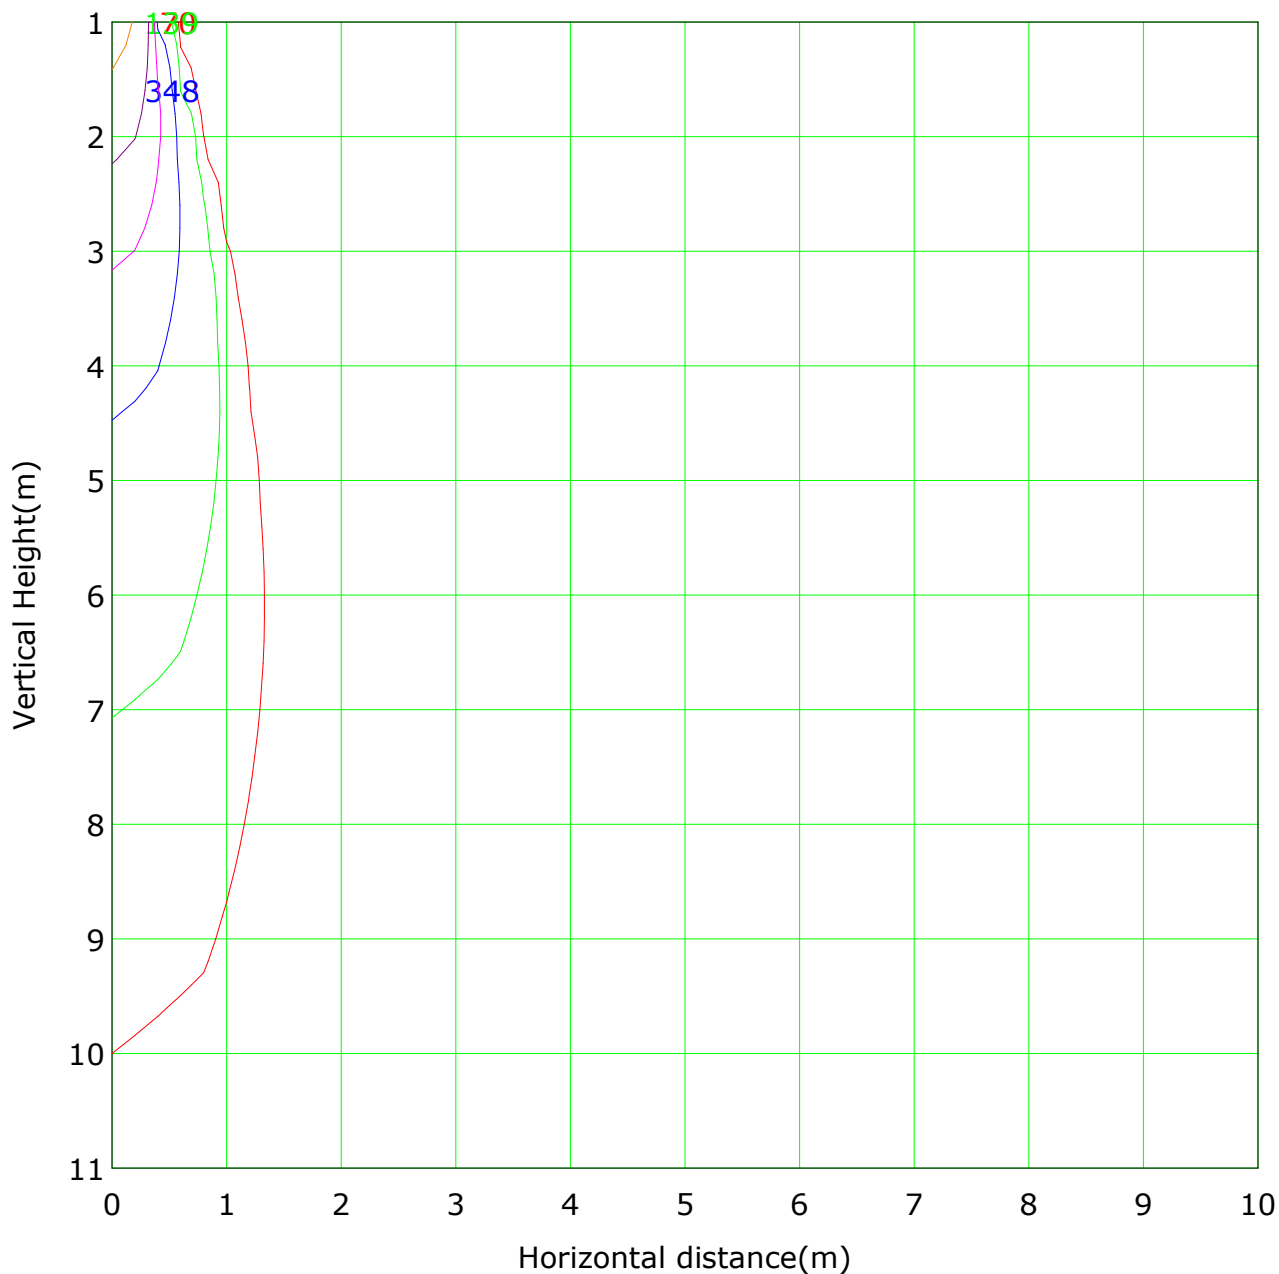


Lowest(m): 1m Highest(m): 11 Max Lux: 6966

(1%): 70 lx	(2%): 139 lx
(5%): 348 lx	(10%): 697 lx
(20%): 1393 lx	(50%): 3483 lx
(100%): 6966 lx	

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:5.0
Test Device: CHL-6E
Distance: 3.000 m
Humidity:
Inspector:

The average illuminance effective figure

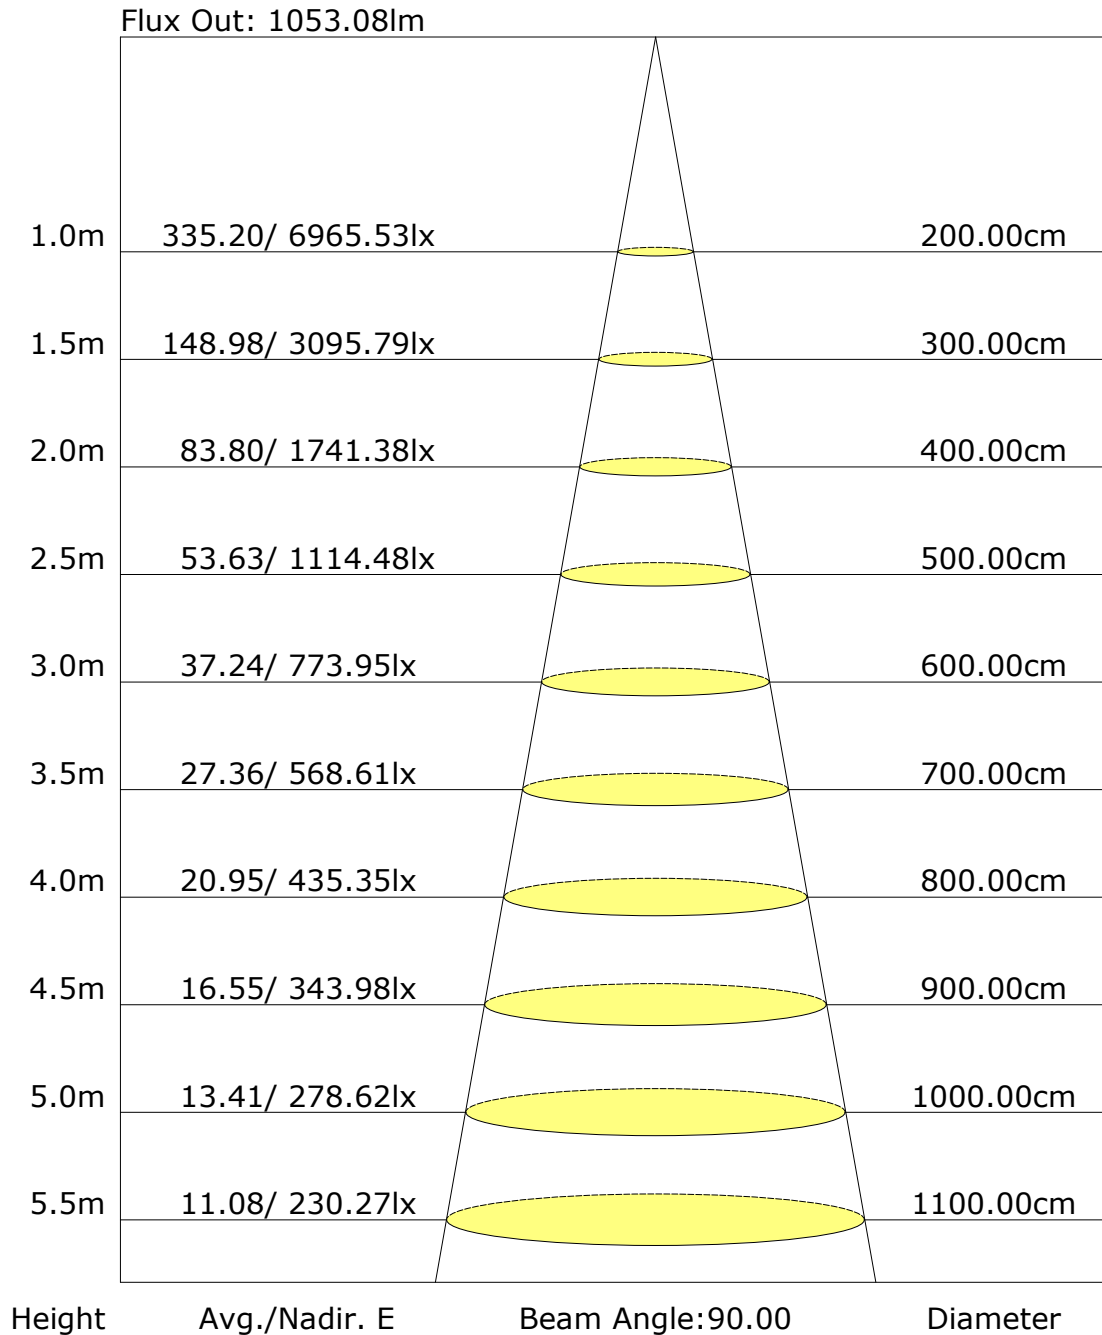

C Plane (°): 0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°): 0.0-90.0: 5.0
Test Device: CHL-6E
Distance: 3.000 m
Humidity:
Inspector:

Zonal Lumen

[illegible]

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0

Test Device: CHL-6E

Distance: 3.000 m

Humidity:

Inspector:

Candlepower Table

Unit: cd

[illegible]

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0

Test Device: CHL-6E

Distance: 3.000 m

Humidity:

Inspector: