



61.02312 SPARK 20 General Lighting

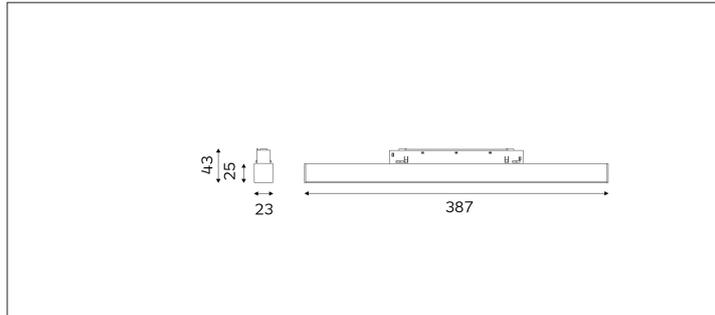

Connected Load	15W
Colour Temperature	2700/3000/3500/4000K
Colour Rendition Index	CRI 90
Optics	PC Cover
Beam Angle	110D
Track	Low Voltage Track
Light Distribution	SPARK 20 General Lighting
Luminous Flux Of The Luminaire	562lm
Luminaire Efficacy	41lm/W
Colour Deviation	SDCM <5
Light Source	LED
LED Type	SMD
Dimming Method	1-10V/ Dali
Cover Material	Aluminum
Body Material	Aluminum
IP Rating	IP20
Housing Colour	Matt White/ Matt Black
Weight	0.5Kg
Technical Region	Input 48V

Light Beam Talbe		
h(m)	E(lx)	D(m)
		110°
1.0	203	2.86
2.0	50	5.71
3.0	22	8.57
4.0	12	11.42
5.0	8	14.28

It is an individual solution with a high degree of flexibility. all inserts are mounted completely without tools and held within the profile by a magnetic force. With just one flick of the wrist, you can adjust the inserts as needed at any time to set the scene for your desired object. Application areas: residential, hotel, restaurants, retail and other high-end places.