

Report No.:81.05511 FOS Pendant Light

Test Time: 2023-06-30 21:17

## Luminaire Property

Luminaire Category: Citizen 1203 3000K CRI90

Luminaire Description: FOS 55 50D

Voltage: 223.9 V

Power: 15.70 W

Lamp Description: Citizen 1204 3000K CRI90

Current: 0.113 A

Power Factor: 0.617

## Photometric Results

CIE Class: Direct

Measurement Flux: 1196.1 lm

Downward Ratio: 100%

Horizontal Diffuse Angle(50%): H45.7

Vertical Diffuse Angle(50%): V45.7

Luminaire Efficacy Rating (LER): 76

Max. Intensity: 2094.91 cd

Total Rated Lamp Lumens: 1196.1 lm


Efficiency: 100%

Upward Ratio: 0%


Central Intensity: 2087.75 cd

Pos of Max. Intensity: H0 V5

Picture Of Luminaire



Luminous Intensity Distribution Curve

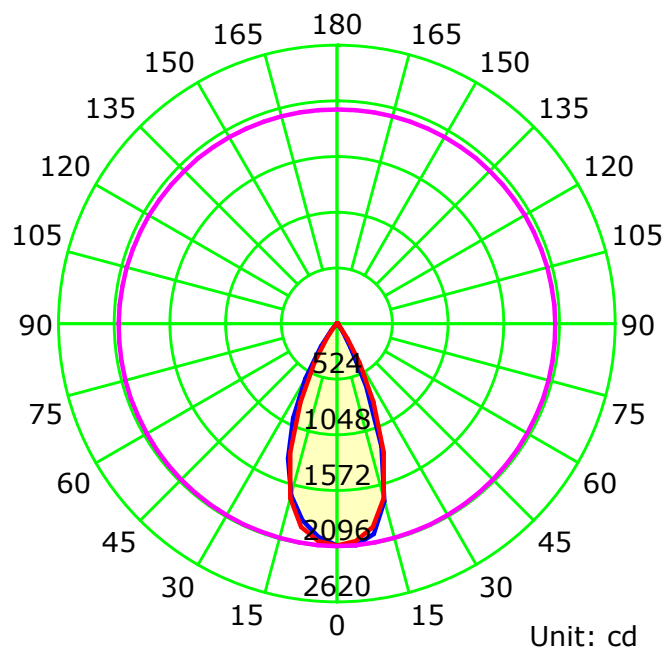

— C0-C180 — C90-C270 — G5

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0



Test Device: CHL-6E

Distance: 3.000 m

Humidity:

Inspector:


## Luminous Intensity Distribution Curve

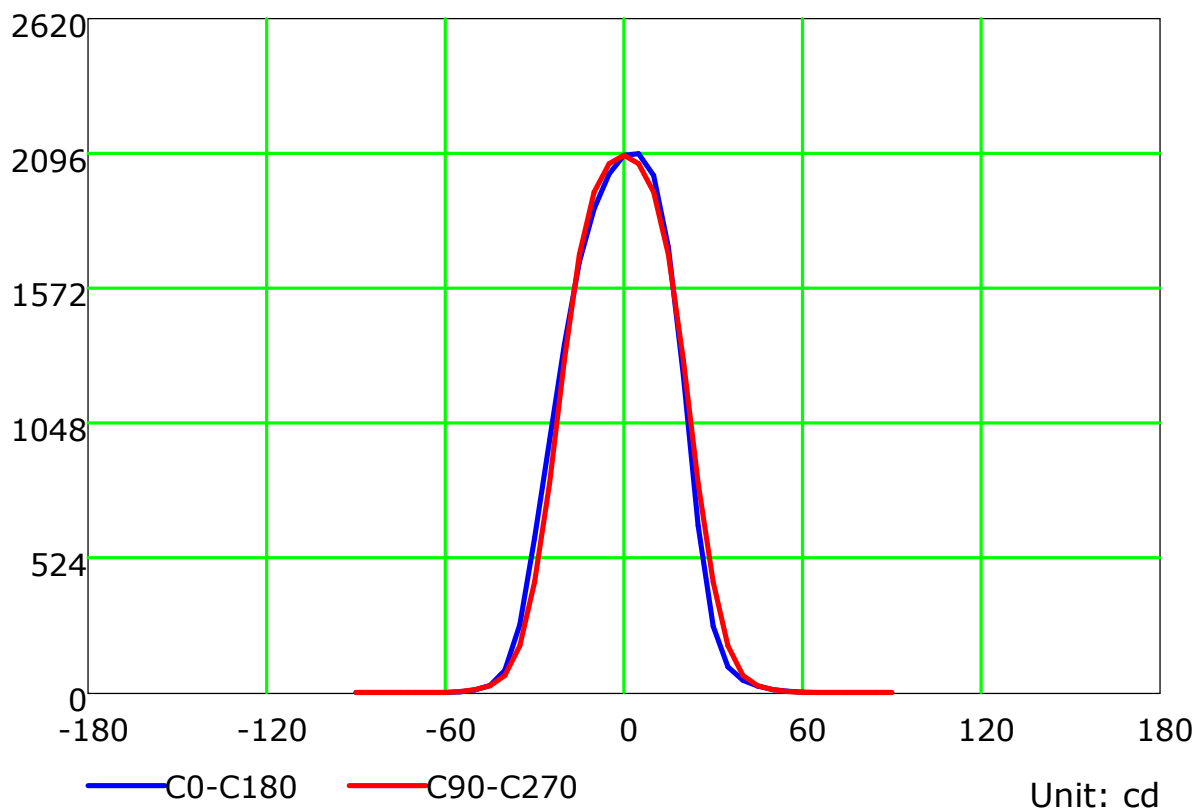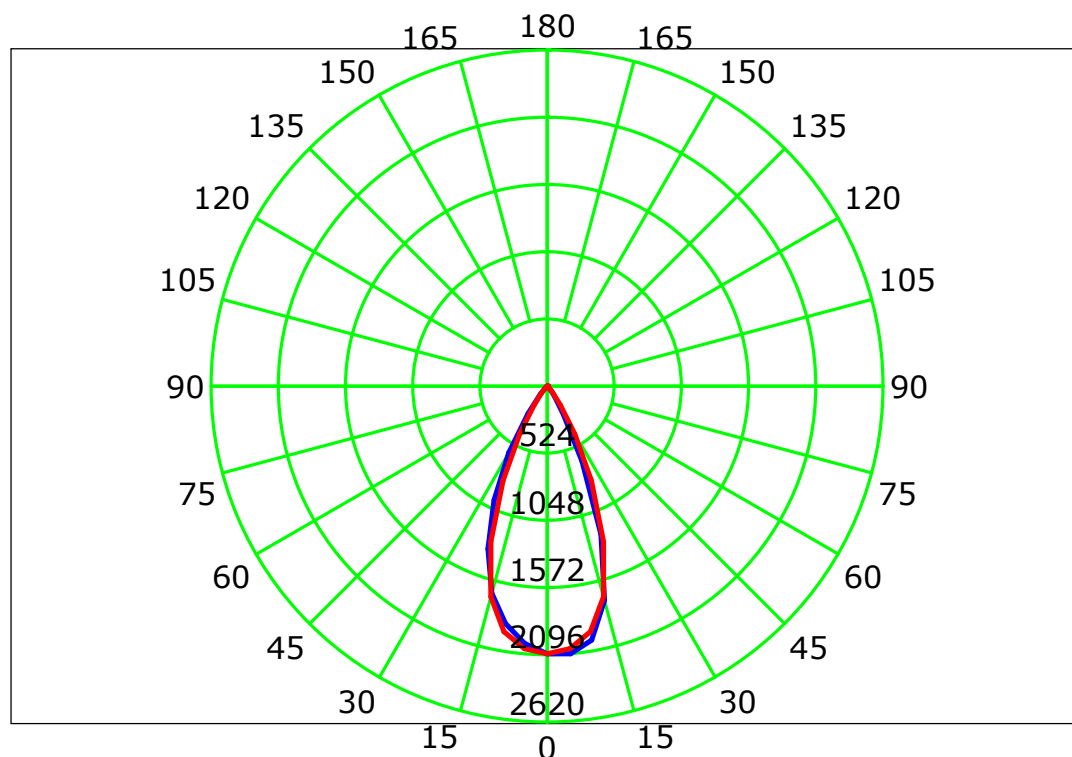

C Plane (°):0.0-180.0: 180.0  
Test Lab:  
Test Type: TYPE C  
Temperature:  
Operator:

Gamma Plane (°):0.0-90.0:5.0  
Test Device: CHL-6E  
Distance: 3.000 m  
Humidity:  
Inspector:

## Isocandela (rectangle)

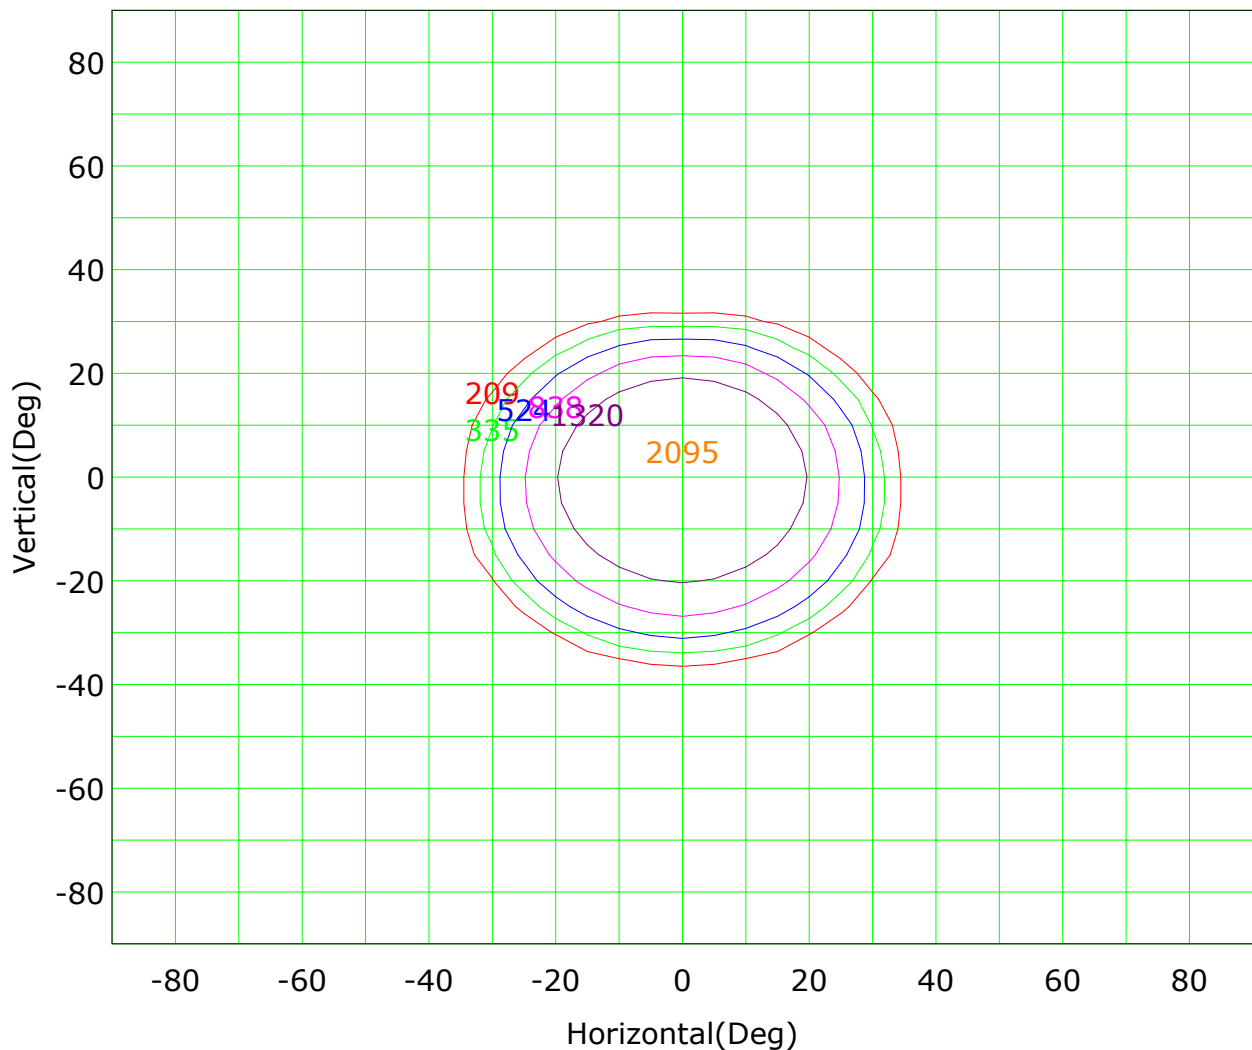

Imax (100%): 2095 cd

( 10%): 209 cd	( 16%): 335 cd
( 25%): 524 cd	( 40%): 838 cd
( 63%): 1320 cd	(100%): 2095 cd

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0


Test Device: CHL-6E

Distance: 3.000 m

Humidity:

Inspector:

## IsoLux Plot

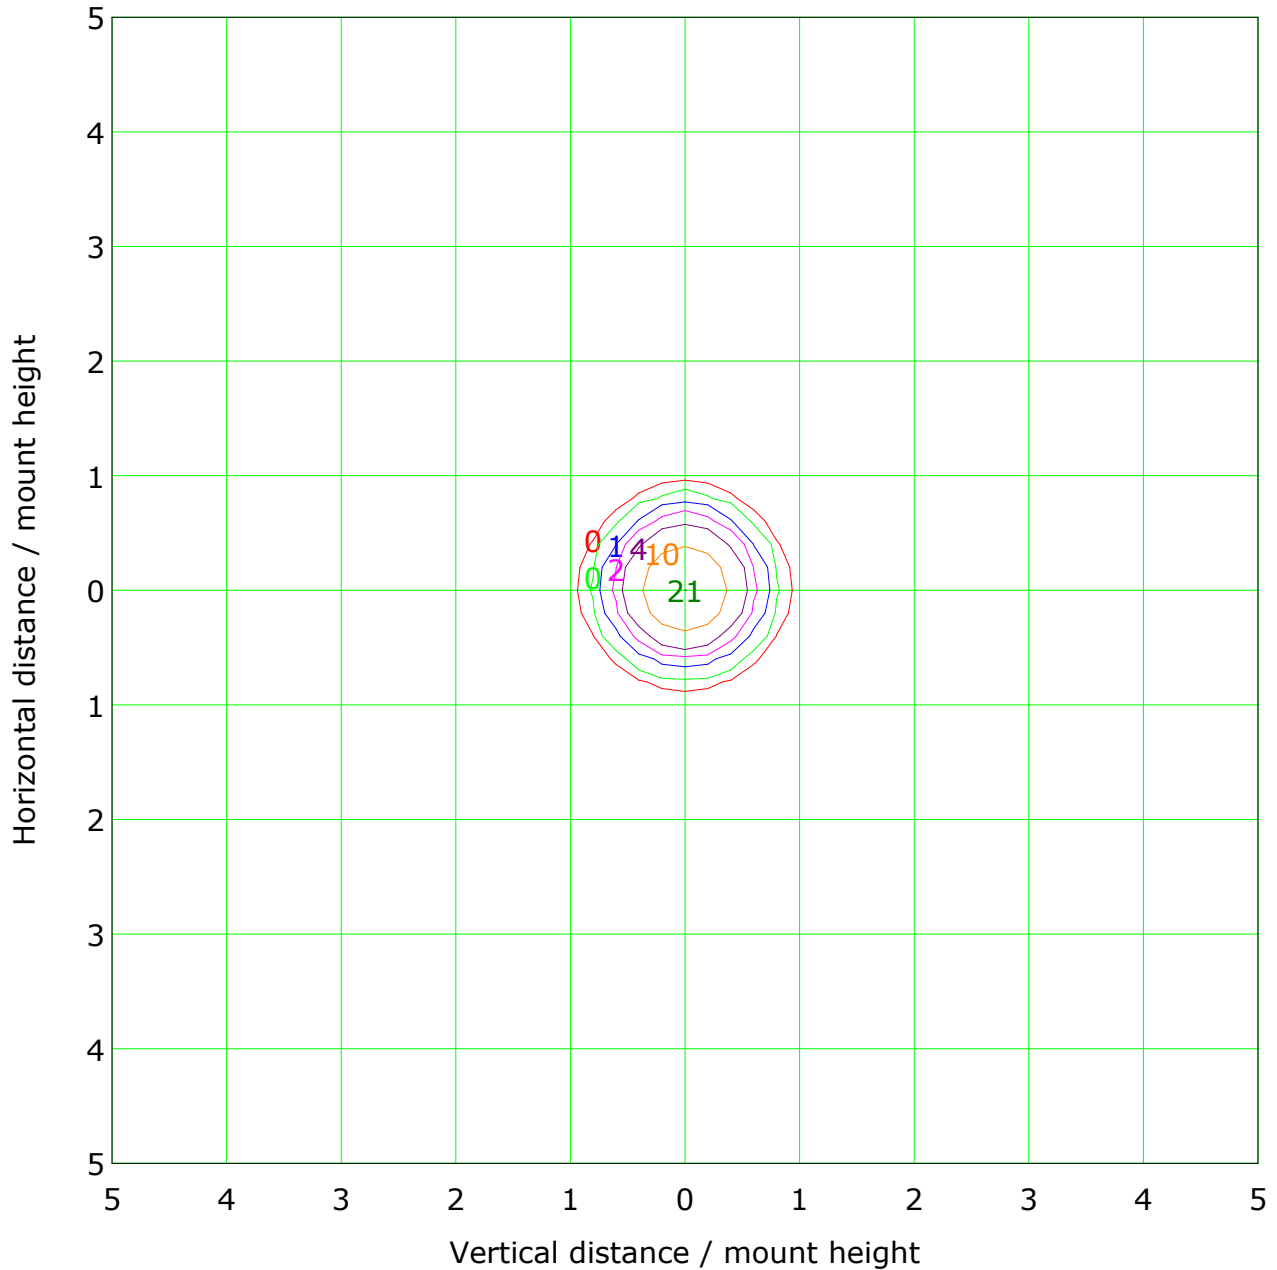

Mounting Height: 10m    Max Lux(100%): 21 lx			
— ( 1%):	0 lx	— ( 2%):	0 lx
— ( 5%):	1 lx	— ( 10%):	2 lx
— ( 20%):	4 lx	— ( 50%):	10 lx
— (100%):	21 lx		

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0


Test Device: CHL-6E

Distance: 3.000 m


Humidity:

Inspector:

## Illuminance at a Distance

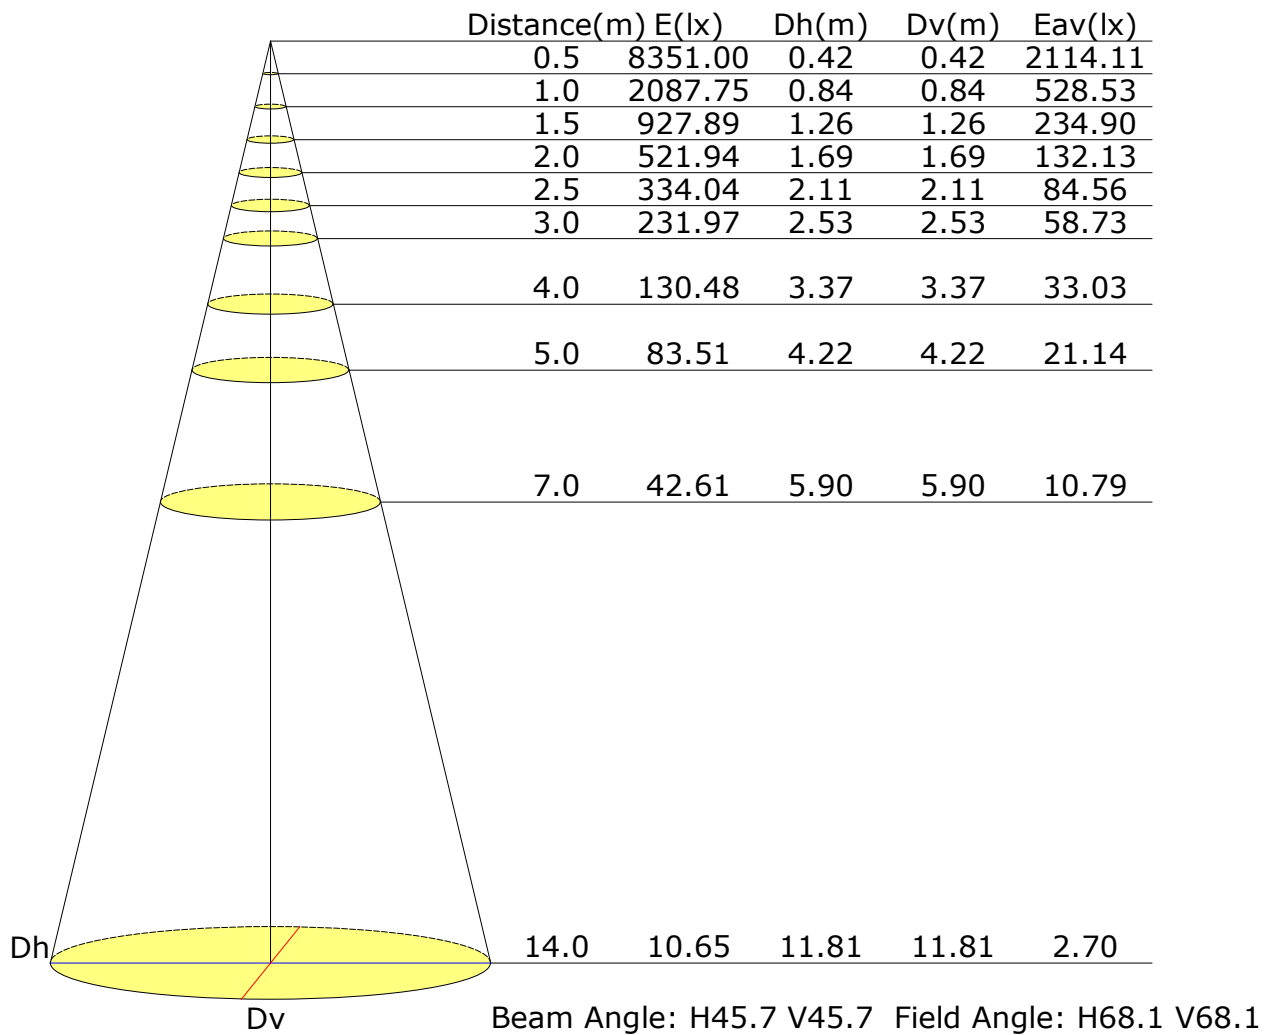

## Vertical IsoLux Plot

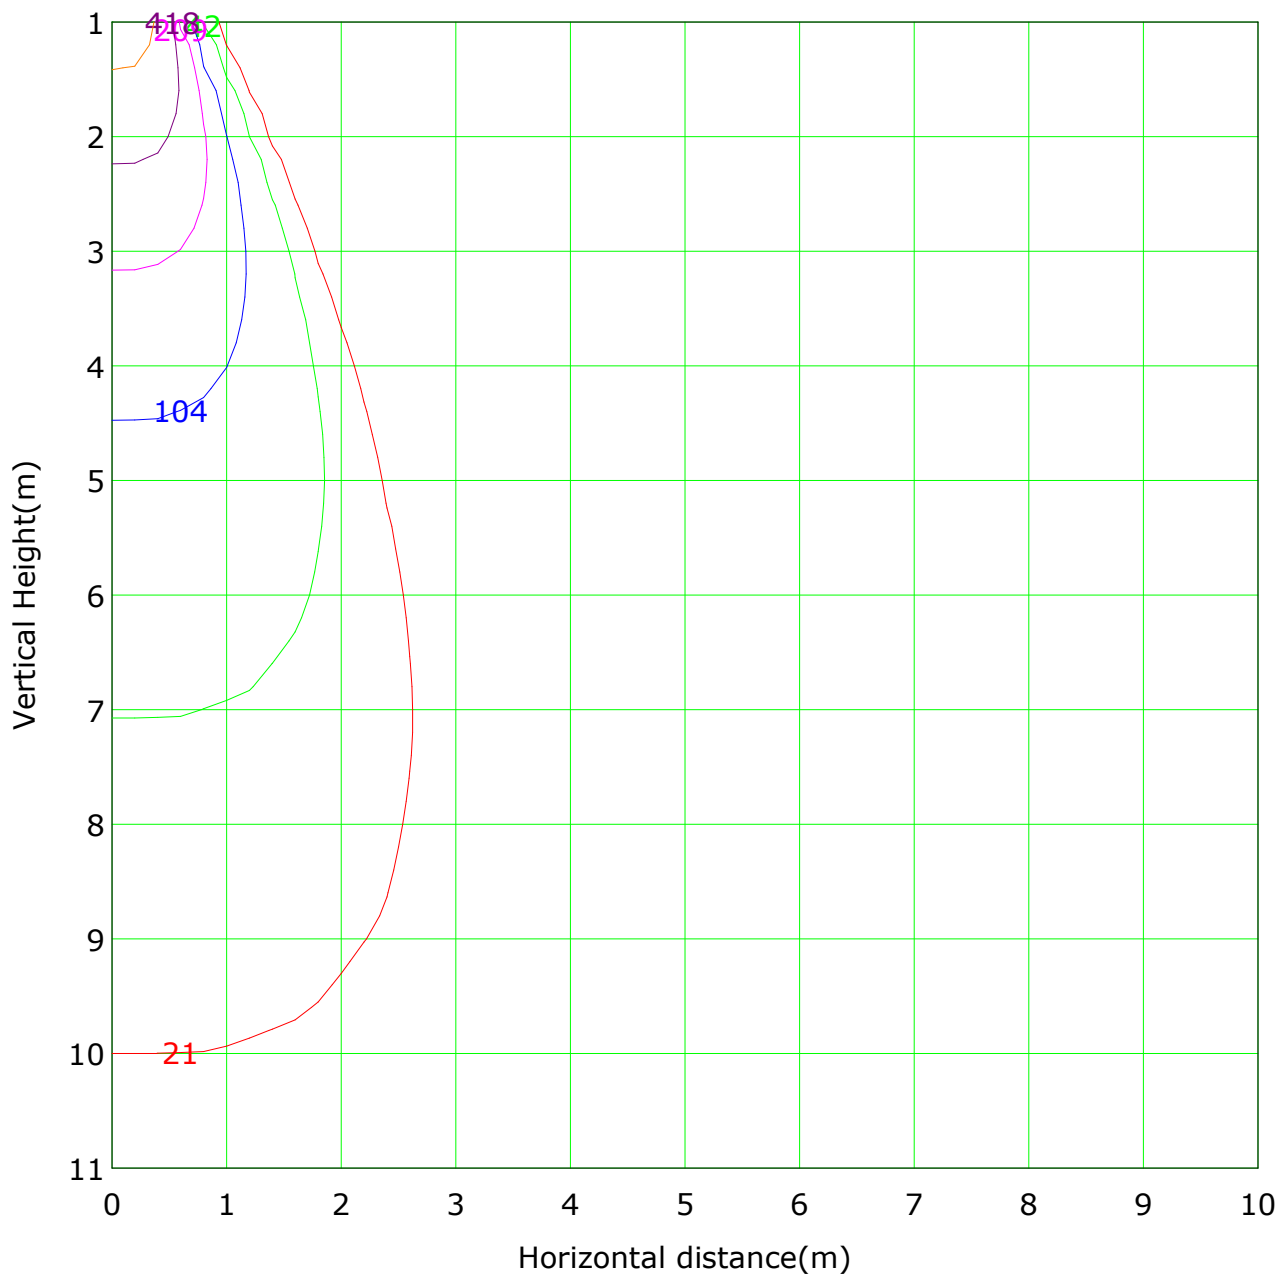


Lowest(m): 1m    Highest(m): 11    Max Lux: 2088

( 1%): 21 lx	( 2%): 42 lx
( 5%): 104 lx	( 10%): 209 lx
( 20%): 418 lx	( 50%): 1044 lx
(100%): 2088 lx	

C Plane (°):0.0-180.0: 180.0  
Test Lab:  
Test Type: TYPE C  
Temperature:  
Operator:

Gamma Plane (°):0.0-90.0:5.0  
Test Device: CHL-6E  
Distance: 3.000 m  
Humidity:  
Inspector:

## The average illuminance effective figure

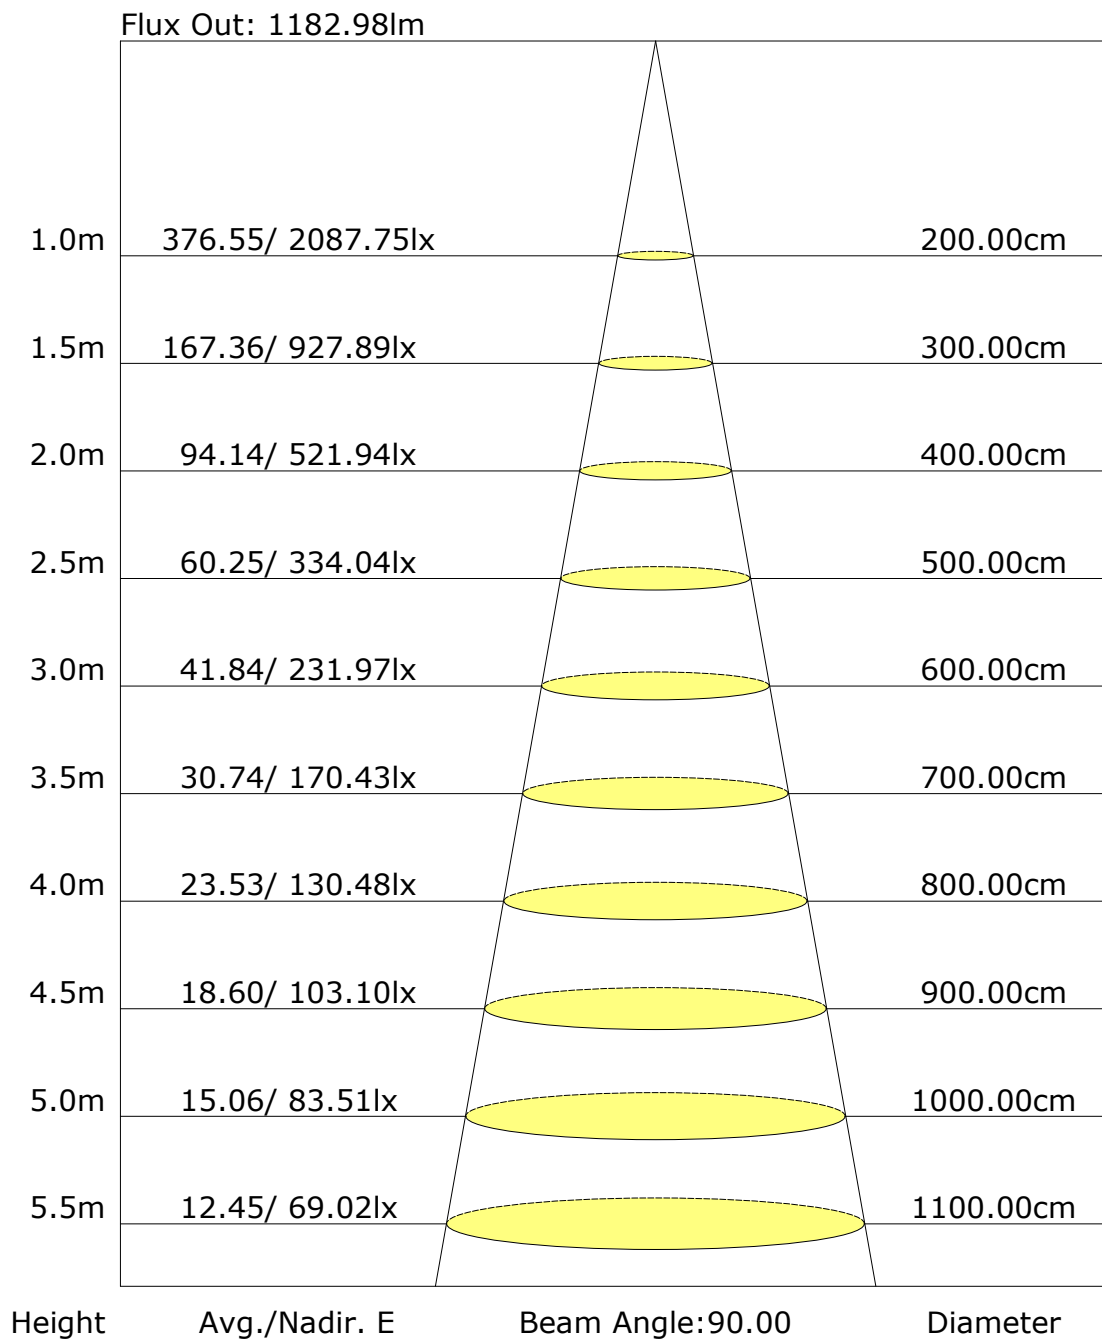

C Plane (°): 0.0-180.0: 180.0  
Test Lab:  
Test Type: TYPE C  
Temperature:  
Operator:

Gamma Plane (°): 0.0-90.0: 5.0  
Test Device: CHL-6E  
Distance: 3.000 m  
Humidity:  
Inspector:

## Zonal Lumen

[illegible]

Inspector:



## Candlepower Table

Unit: cd

[illegible]

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0

Test Device: CHL-6E

Distance: 3.000 m

Humidity:

Inspector: