


LENS Pendant Lighting

Pendant Lighting 105 | 116

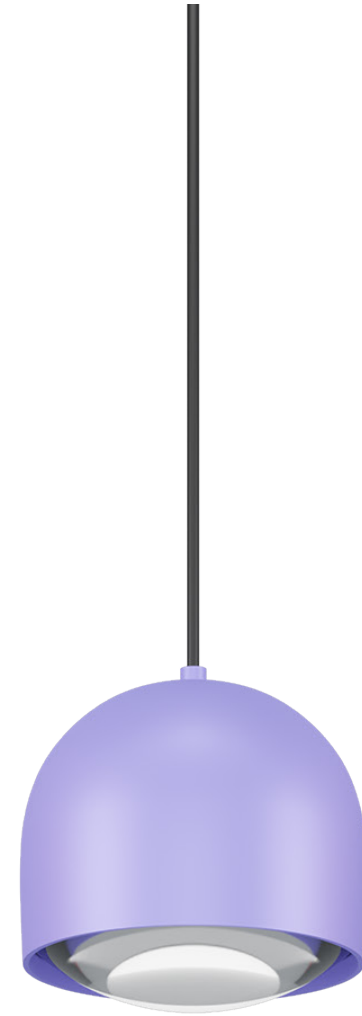


LENS Pendant Lighting


LENS Pendant Lighting 105 | 116



LENS Pendant Lighting

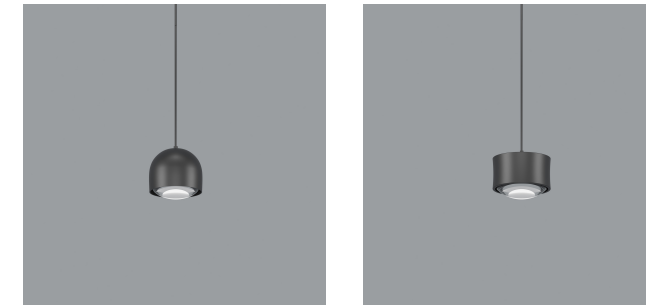

LENS 105 81.10511 LENS 116 81.11611

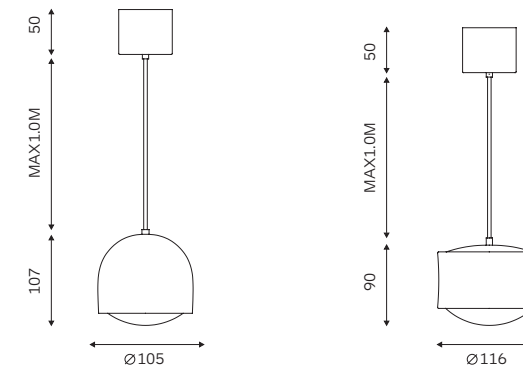

Body

The body is carved out of pure aluminum, special appearance with strong heat dissipation performance.

The design cover all installation methods, including track, surfaced mounted, wall and pendant, to meet the design requirements of different high end places.

Break the traditional optics, used special material glass lens, good anti-glare and average spot.

Accessories

Honeycomb louvre, Linear Spread glass, Spread glass, glass.

Finish

Black or white colour.

LED sources

Light source: COB LED
CRI: 90 | CCT: 3000K, 4000K
Other CRI and CCT options available on request.

Optic

Lens.
Narrow, medium and wide beam angle available.


Driver

Supplied with internal driver.

Applications

Application areas: High end residential and retail projects, hotels, museums and galleries.


Suitable Accessories



Linear Spread glass



Glass



Honeycomb louvre

Code Ordering Example: 8 1 . 1 0 5 1 1 - 9 0 3 0 1 9 D 0 1 0

	Product Code	Light Source Code	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (BA)	Driver Options	Finish
LENS 105 Pendant Lighting	81.10511 CA	COB LED	90	30 3000K	20W	1700 lm	40°/80°	D0 No Dim	10 □ WH
			40	4000k		1900 lm		DA Dali Dim	20 ■ BK
LENS 116 Pendant Lighting	81.11611 CA	COB LED	90	30 3000K	20W	1700 lm	40°/80°	DC 0-10V Dim	
			40	4000k		1900 lm			