

Report No.: 57.07502 SILO Downlight

Test Time: 2022-12-30 09:40

## Luminaire Property

Luminaire Category: Citizen 1203 3000K CRI90

Voltage: 209.0 V

Current: 0.106 A

Power: 15.00 W

Power Factor: 0.678

## Photometric Results

CIE Class: Direct

Measurement Flux: 1167.7 lm

Downward Ratio: 100%

Horizontal Diffuse Angle(50%): H26.3

Vertical Diffuse Angle(50%): V26.3

Luminaire Efficacy Rating (LER): 78

Max. Intensity: 4853.38 cd

Total Rated Lamp Lumens: 1167.7 lm


Efficiency: 100%

Upward Ratio: 0%


Central Intensity: 4853.38 cd

Pos of Max. Intensity: H0 V0

Picture Of Luminaire



Luminous Intensity Distribution Curve

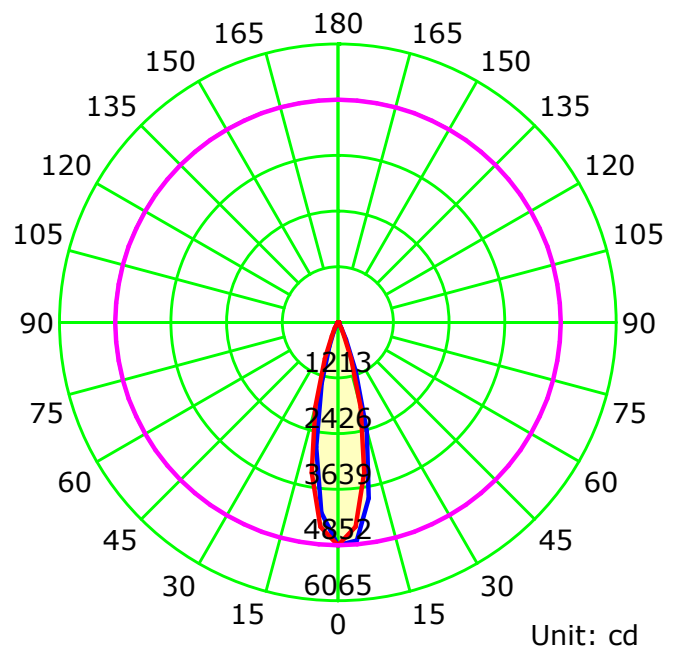

— C0-C180 — C90-C270 — G0

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0


Test Device: CHL-6E

Distance: 3.000 m

Humidity:

Inspector:


## Luminous Intensity Distribution Curve

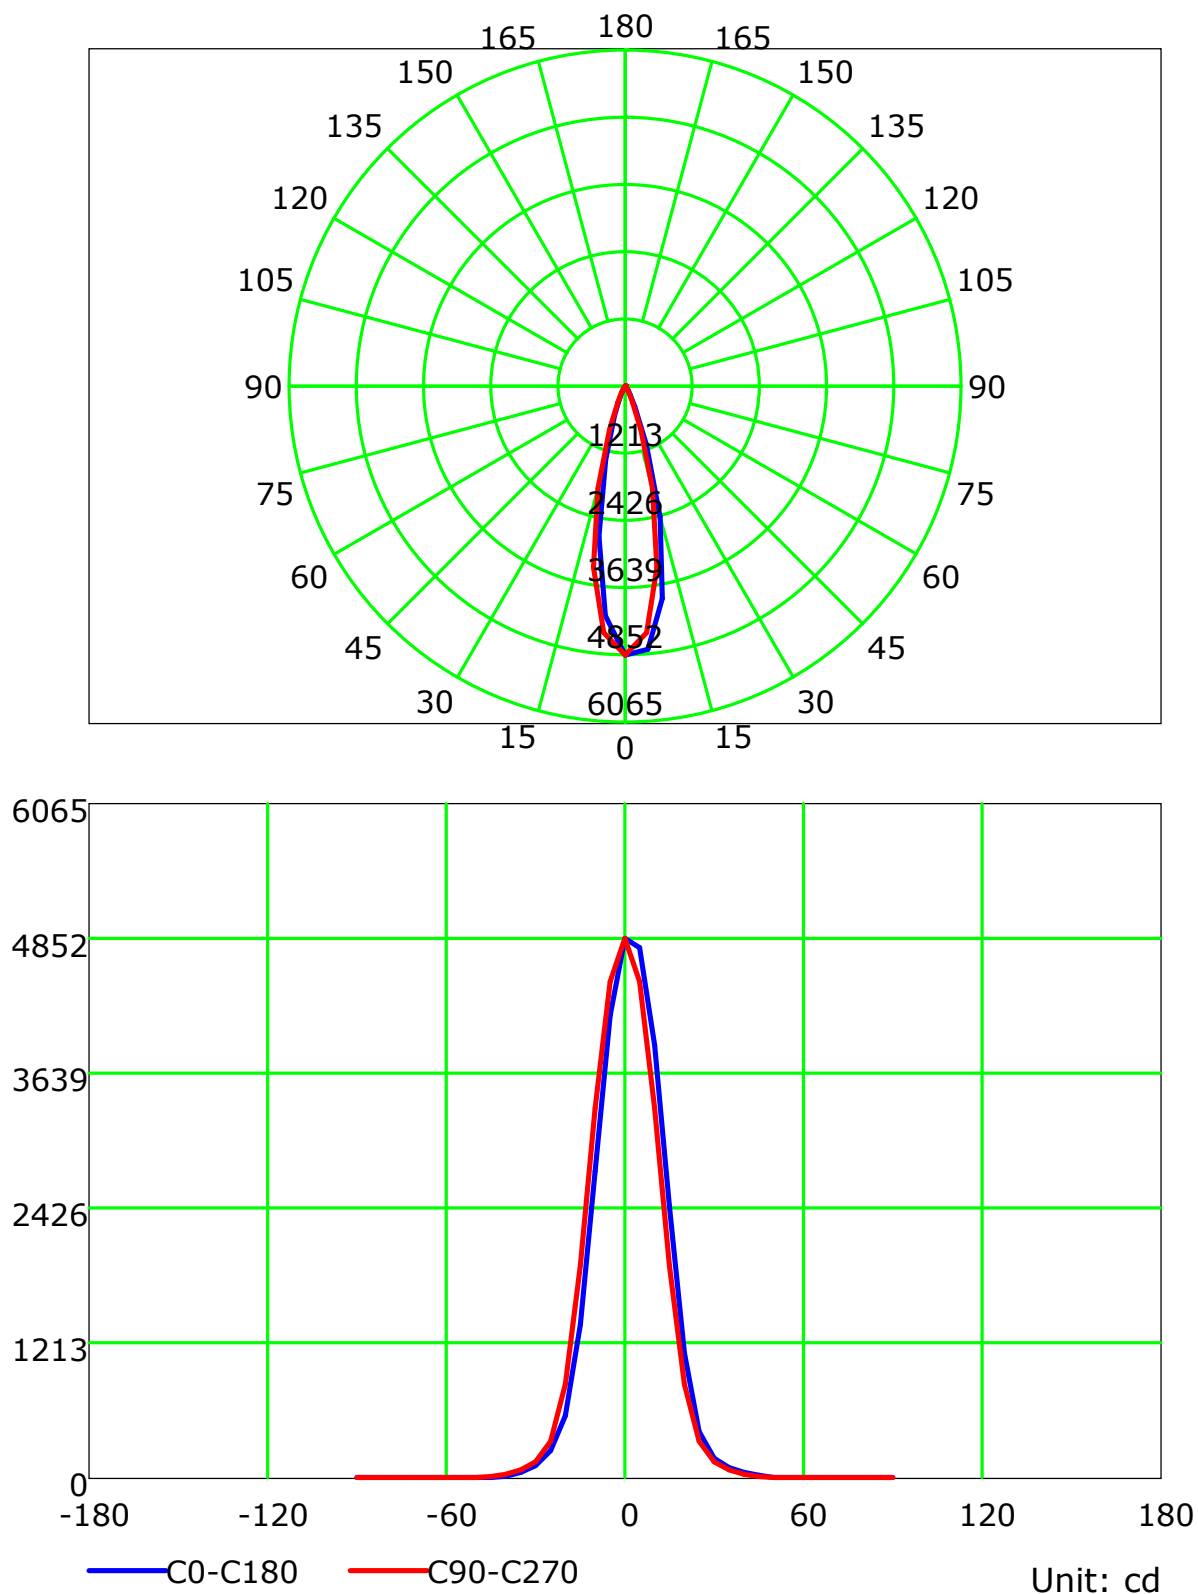

C Plane (°):0.0-180.0: 180.0  
Test Lab:  
Test Type: TYPE C  
Temperature:  
Operator:

Gamma Plane (°):0.0-90.0:5.0  
Test Device: CHL-6E  
Distance: 3.000 m  
Humidity:  
Inspector:

## Isocandela (rectangle)

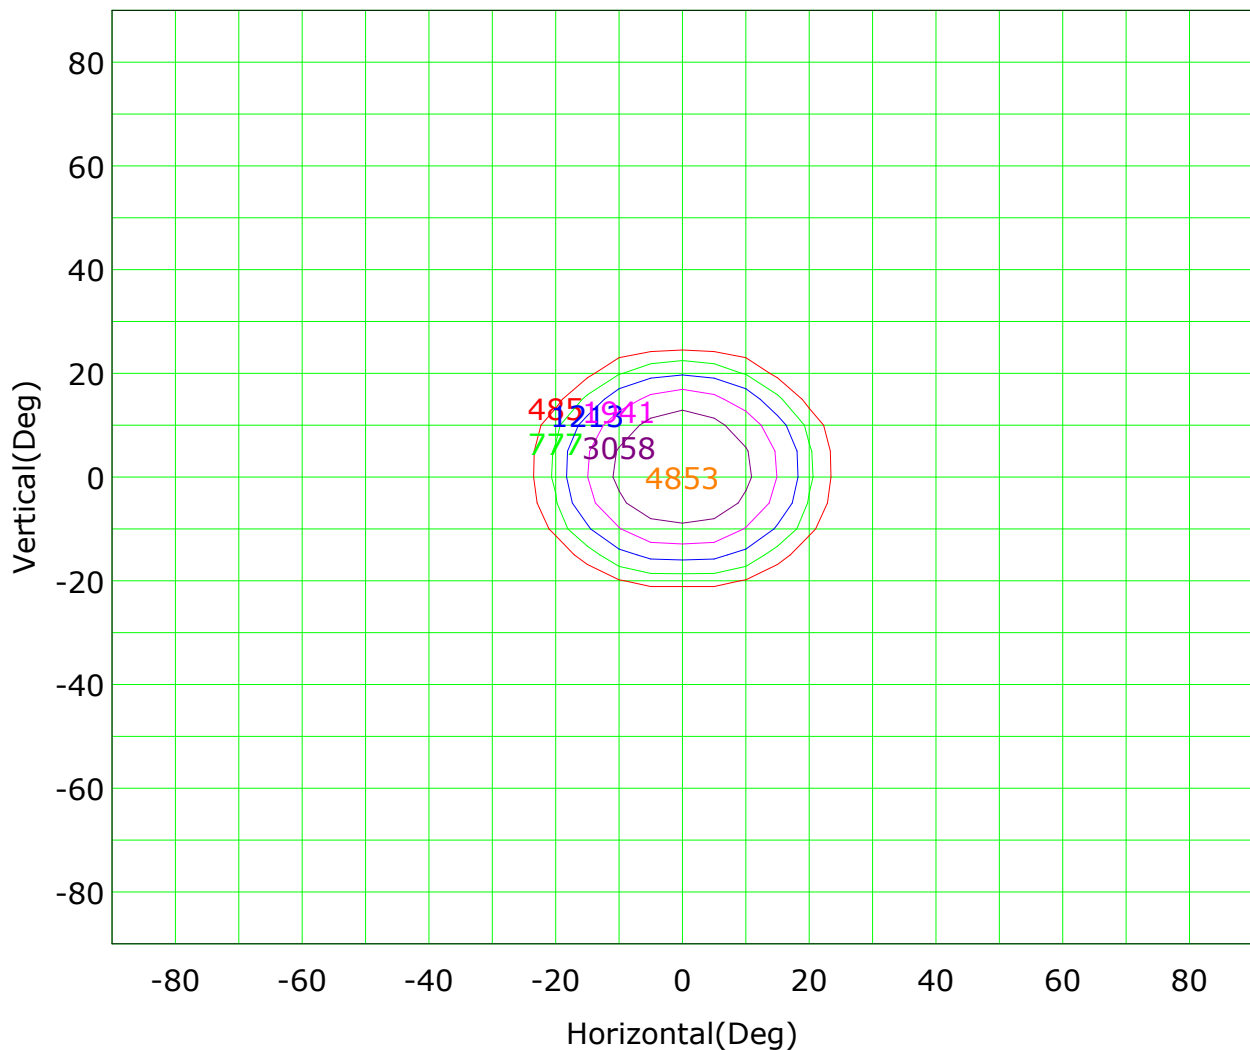

Imax (100%): 4853 cd

( 10%): 485 cd	( 16%): 777 cd
( 25%): 1213 cd	( 40%): 1941 cd
( 63%): 3058 cd	(100%): 4853 cd

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0


Test Device: CHL-6E

Distance: 3.000 m

Humidity:

Inspector:

## IsoLux Plot

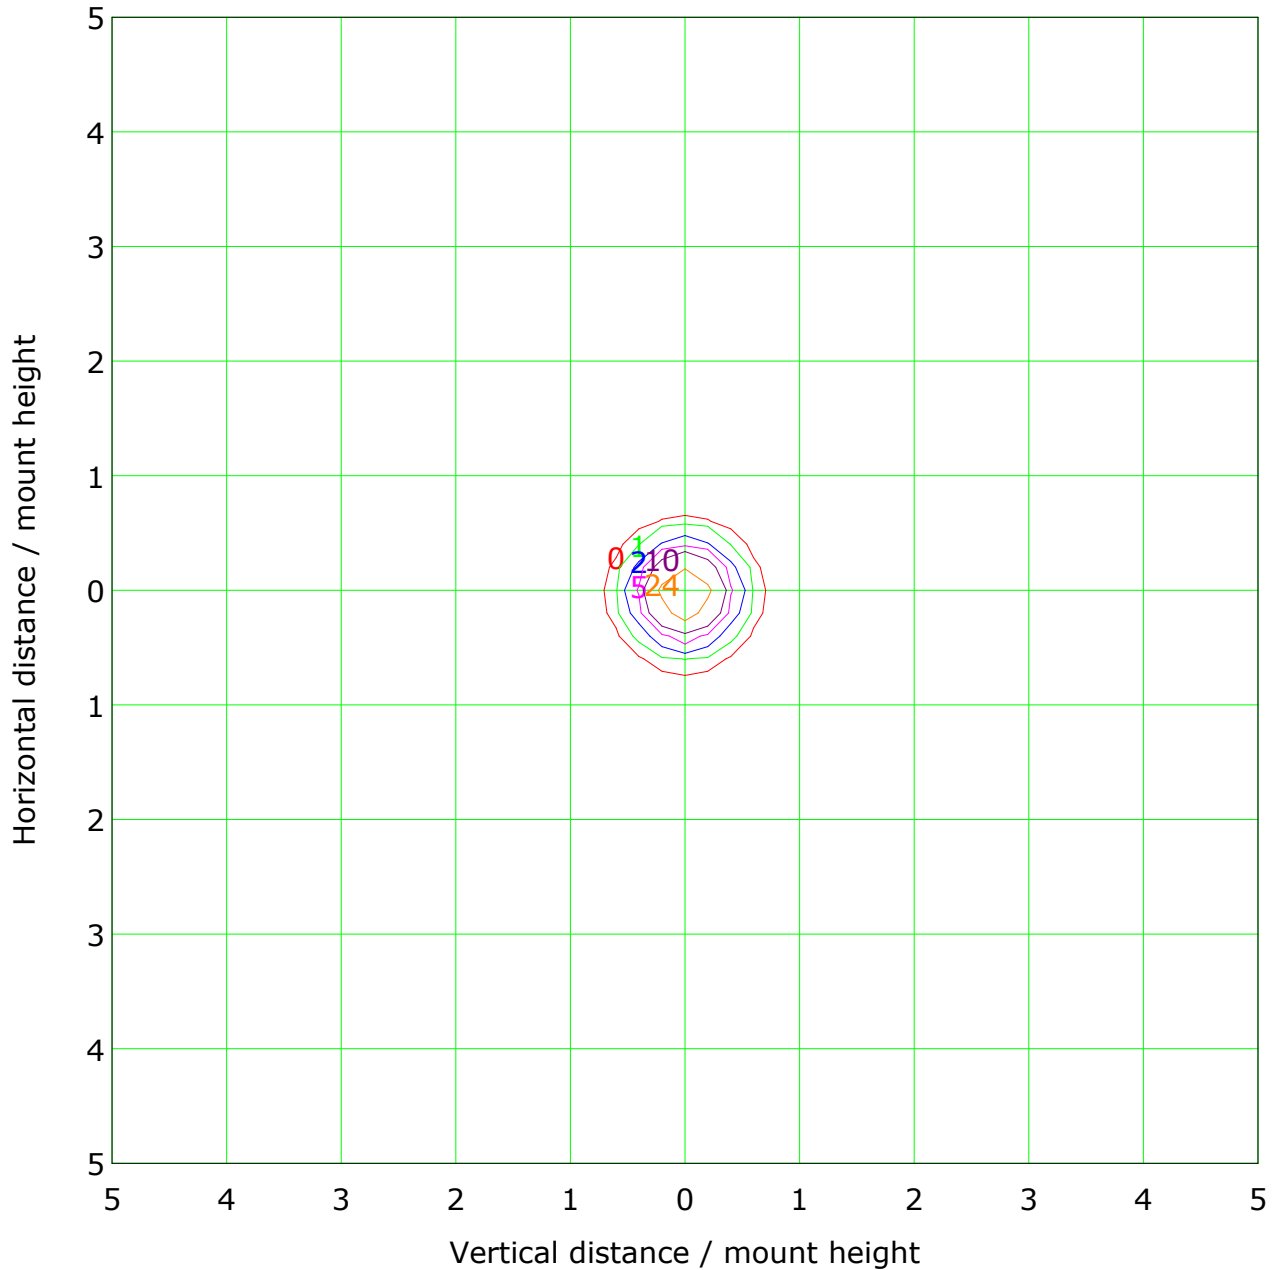

Mounting Height: 10m    Max Lux(100%): 49 lx			
— ( 1%):	0 lx	— ( 2%):	1 lx
— ( 5%):	2 lx	— ( 10%):	5 lx
— ( 20%):	10 lx	— ( 50%):	24 lx
— (100%):	49 lx		

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0


Test Device: CHL-6E

Distance: 3.000 m


Humidity:

Inspector:

## Illuminance at a Distance

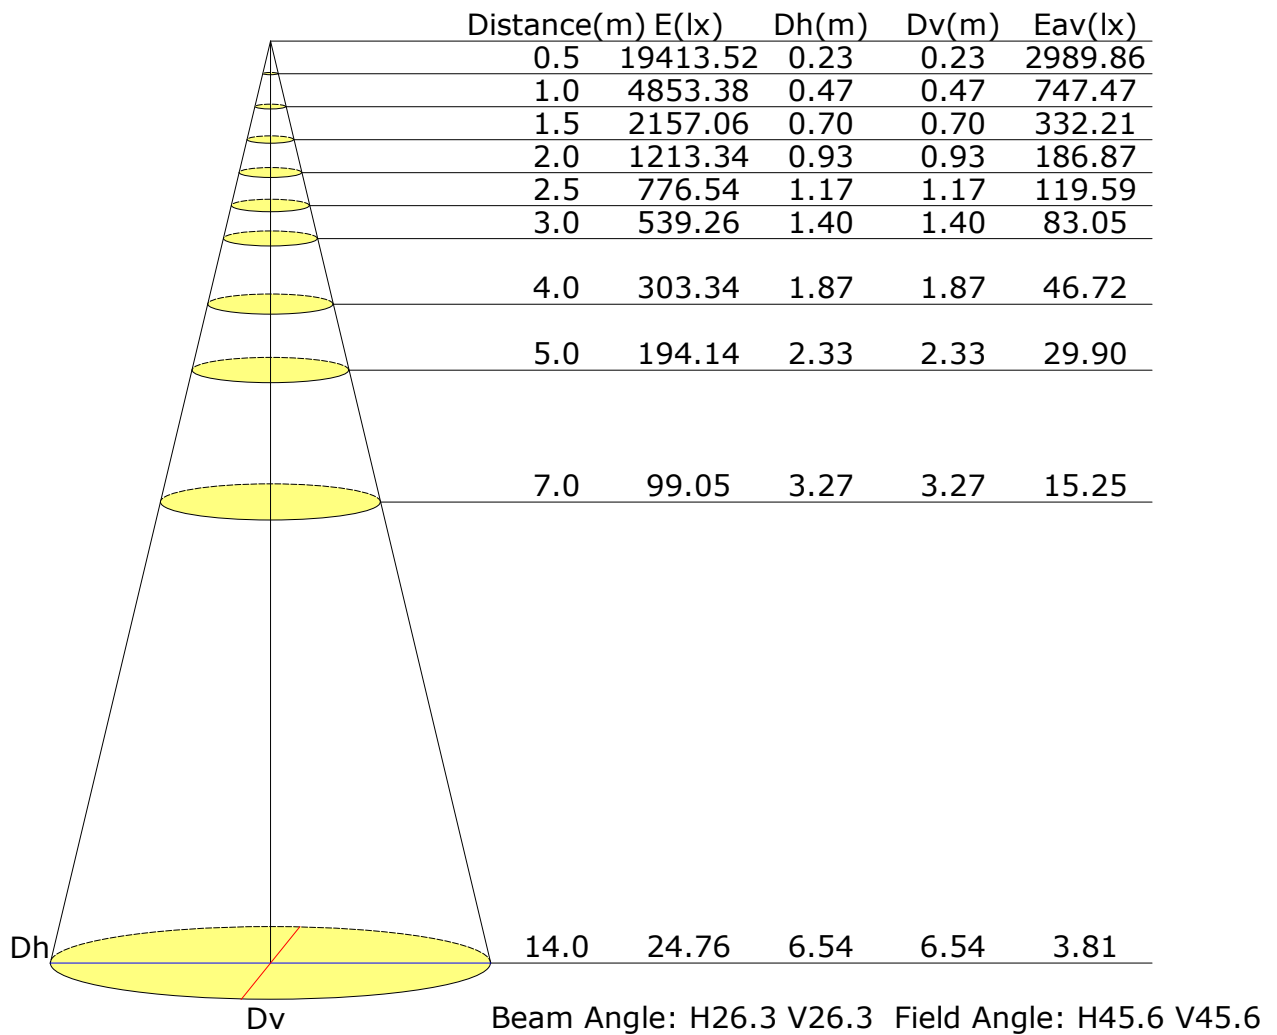

## Vertical IsoLux Plot

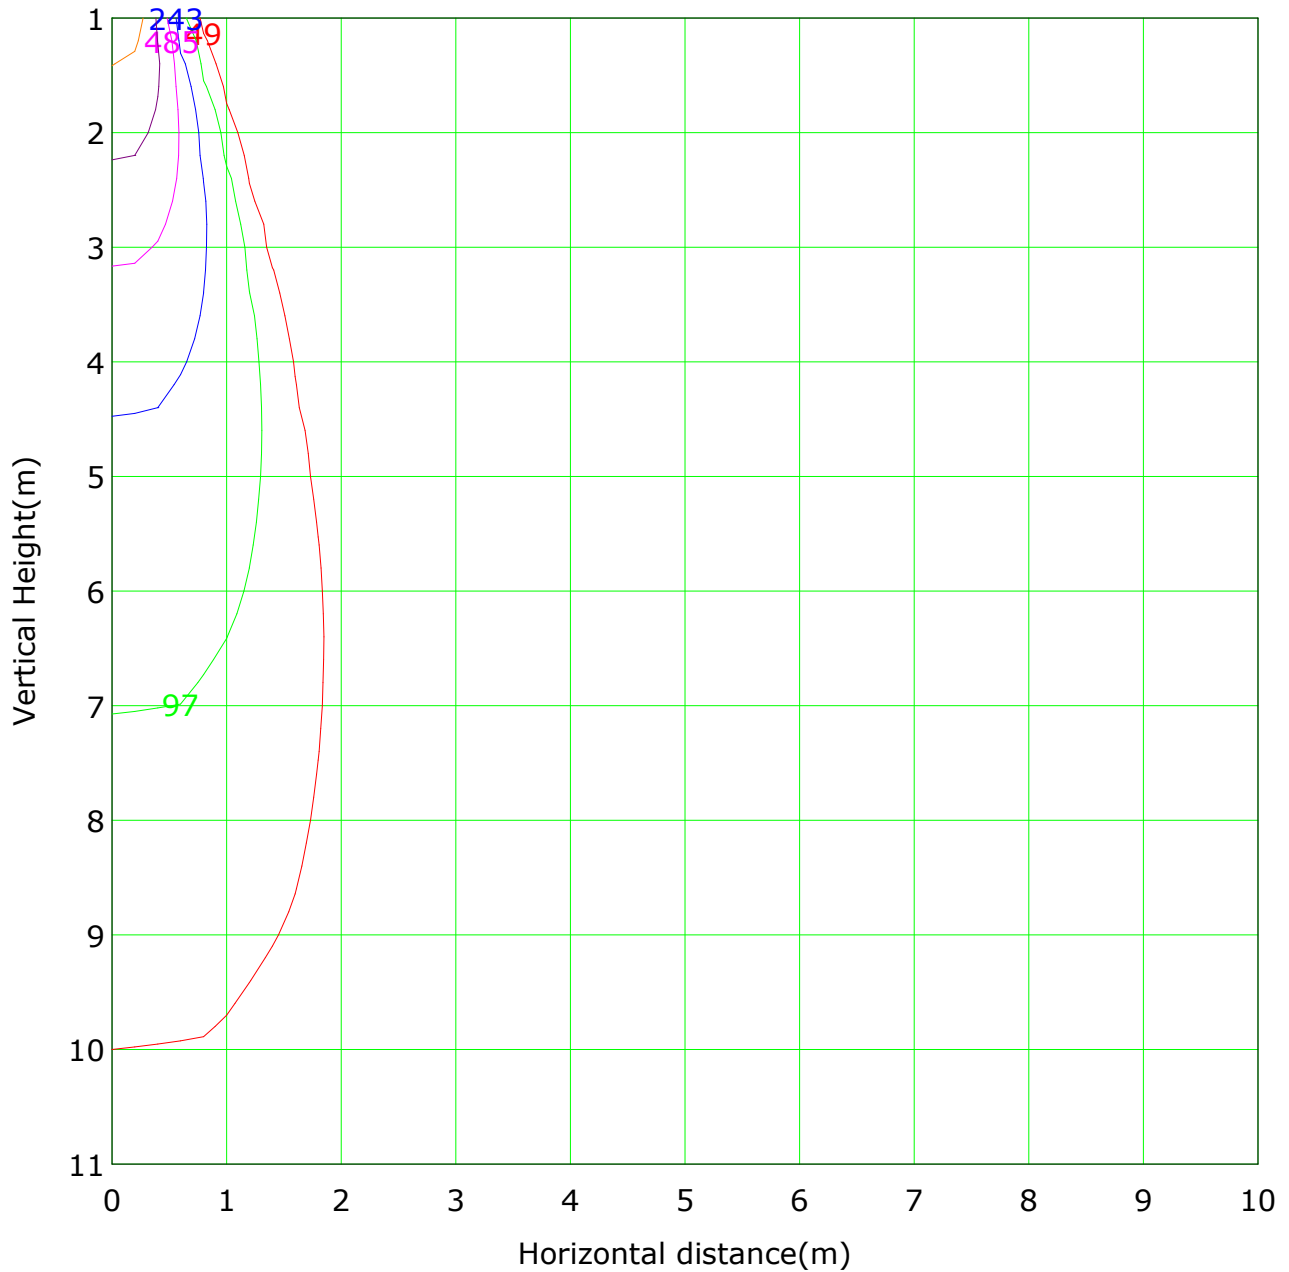

Lowest(m): 1m    Highest(m): 11    Max Lux: 4853

( 1%): 49 lx	( 2%): 97 lx
( 5%): 243 lx	( 10%): 485 lx
( 20%): 971 lx	( 50%): 2427 lx
(100%): 4853 lx	

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0


Test Device: CHL-6E

Distance: 3.000 m

Humidity:

Inspector:

## The average illuminance effective figure

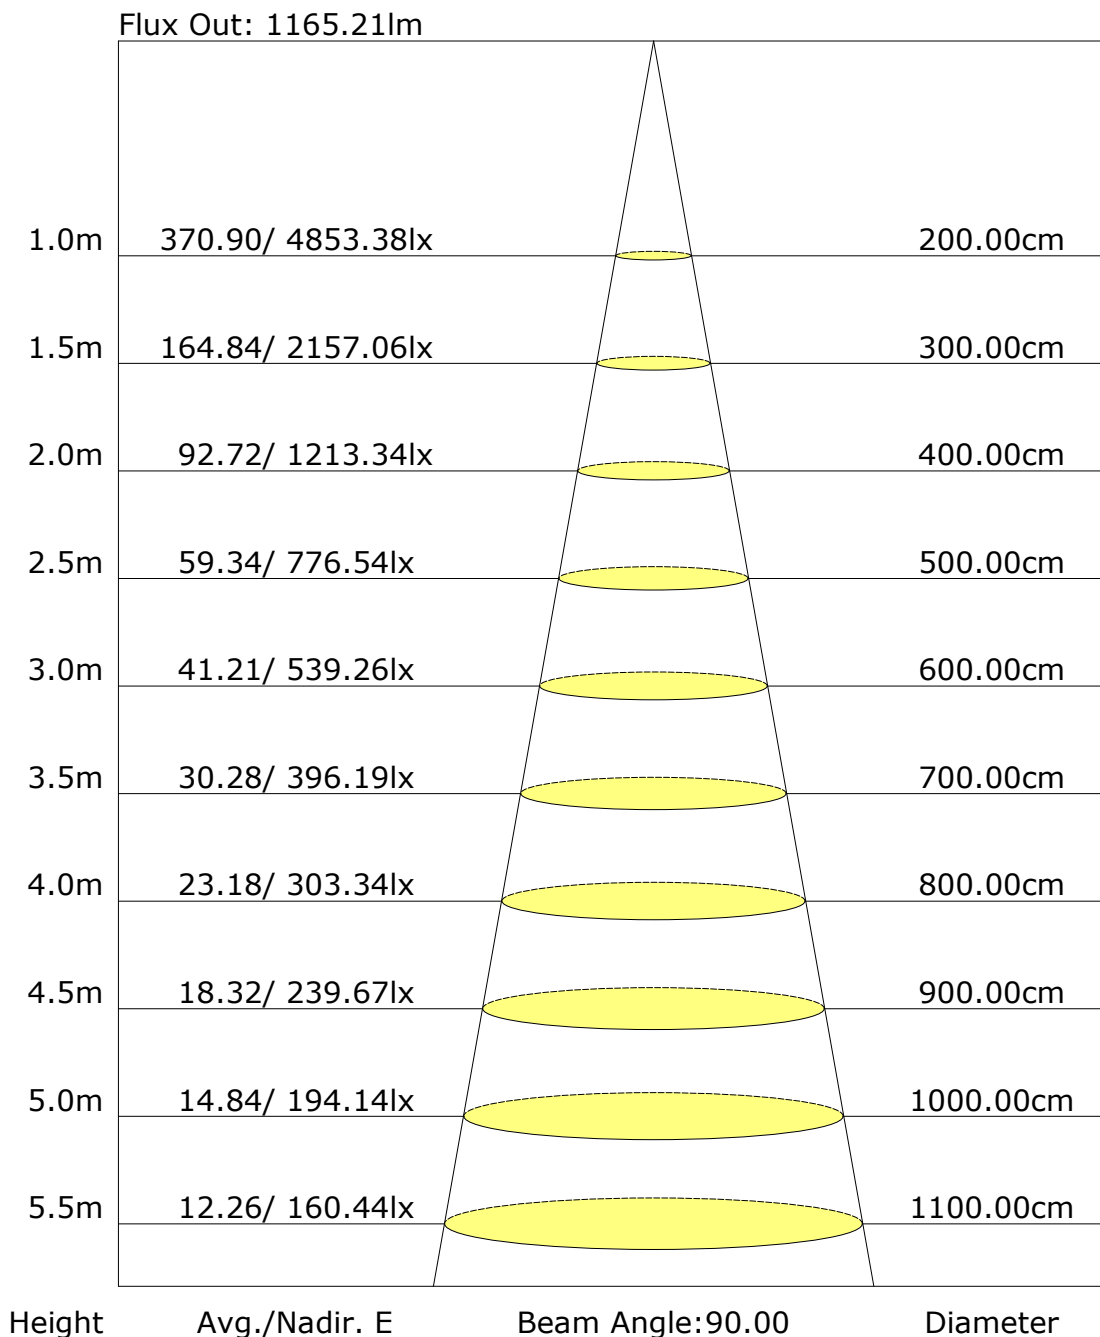

C Plane (°): 0.0-180.0: 180.0  
Test Lab:  
Test Type: TYPE C  
Temperature:  
Operator:

Gamma Plane (°): 0.0-90.0: 5.0  
Test Device: CHL-6E  
Distance: 3.000 m  
Humidity:  
Inspector:

## Zonal Lumen

[illegible]

Inspector:



## Candlepower Table

Unit: cd

[illegible]

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0

Test Device: CHL-6E

Distance: 3.000 m

Humidity:

Inspector: