

Report No.:93.05512 FOS Surface Mounted Test Time: 2023-06-30 17:06

Luminaire Property

Luminaire Category: Citizen 1203 3000K CRI90

Luminaire Description: FOS 55 24D

Current: 0.114 A

Power Factor: 0.672

Voltage: 206.3 V

Power: 16.00 W

Photometric Results

CIE Class: Direct

Measurement Flux: 1408.7 lm

Downward Ratio: 100%

Horizontal Diffuse Angle(50%): H31.2

Vertical Diffuse Angle(50%): V31.2

Luminaire Efficacy Rating (LER): 88

Max. Intensity: 4998.25 cd

Total Rated Lamp Lumens: 1408.7 lm


Efficiency: 100%

Upward Ratio: 0%


Central Intensity: 4998.24 cd

Pos of Max. Intensity: H0 V0

Picture Of Luminaire



Luminous Intensity Distribution Curve

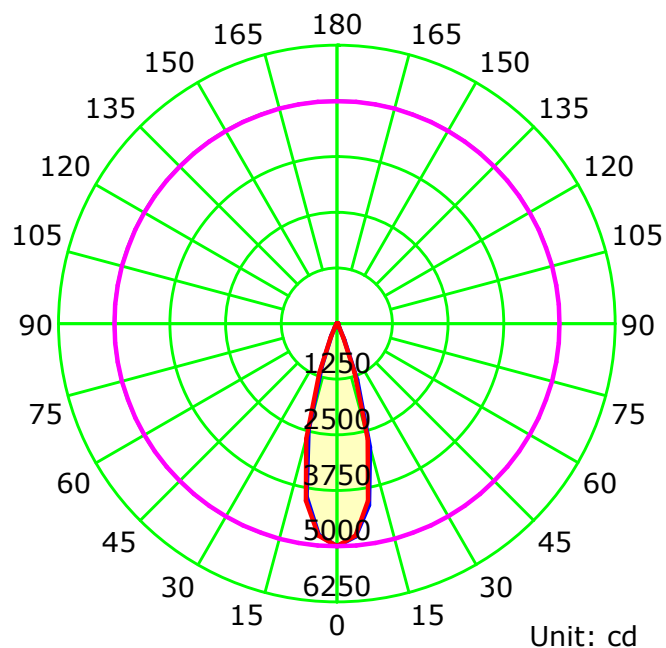

— C0-C180 — C90-C270 — G0

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0



Test Device: CHL-6E

Distance: 3.000 m

Humidity:

Inspector:

Luminous Intensity Distribution Curve

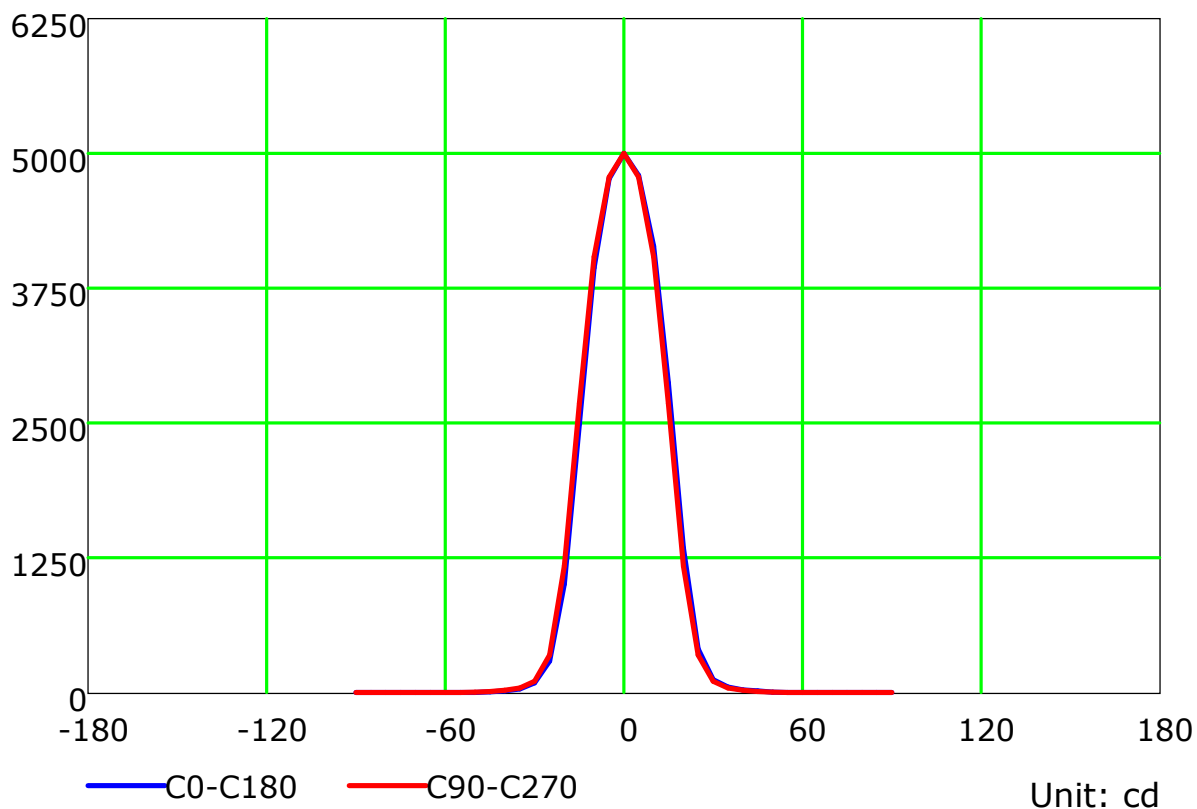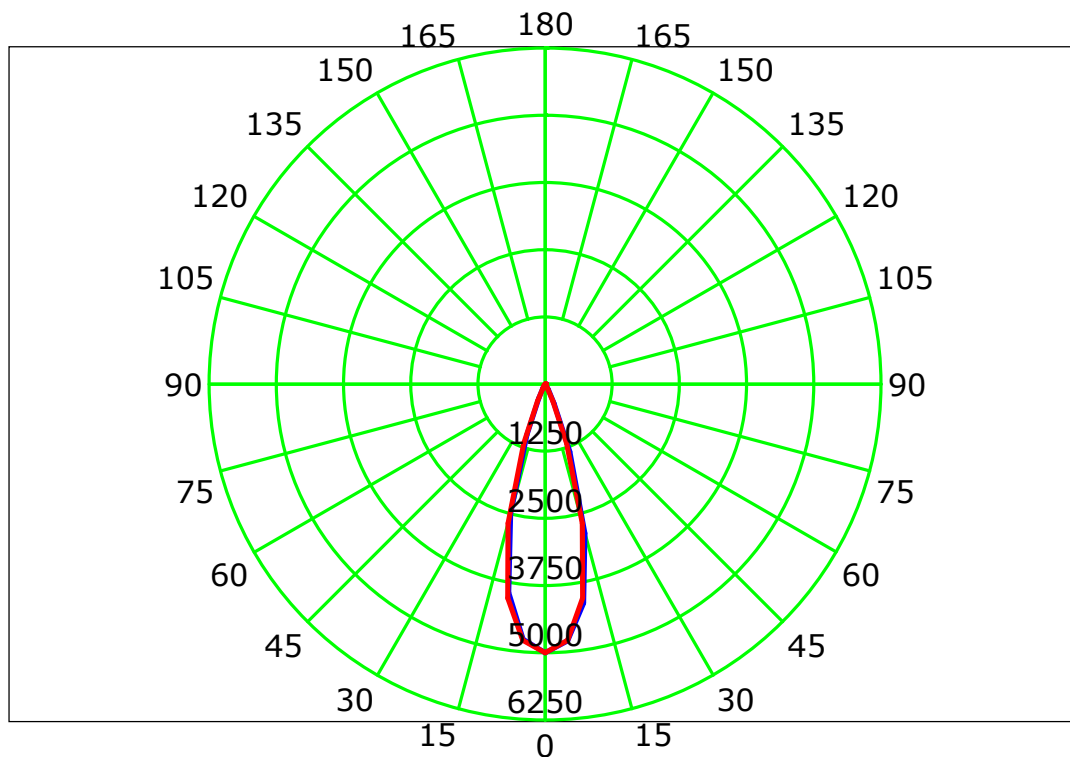


Unit: cd

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:5.0
Test Device: CHL-6E
Distance: 3.000 m
Humidity:
Inspector:

Isocandela (rectangle)

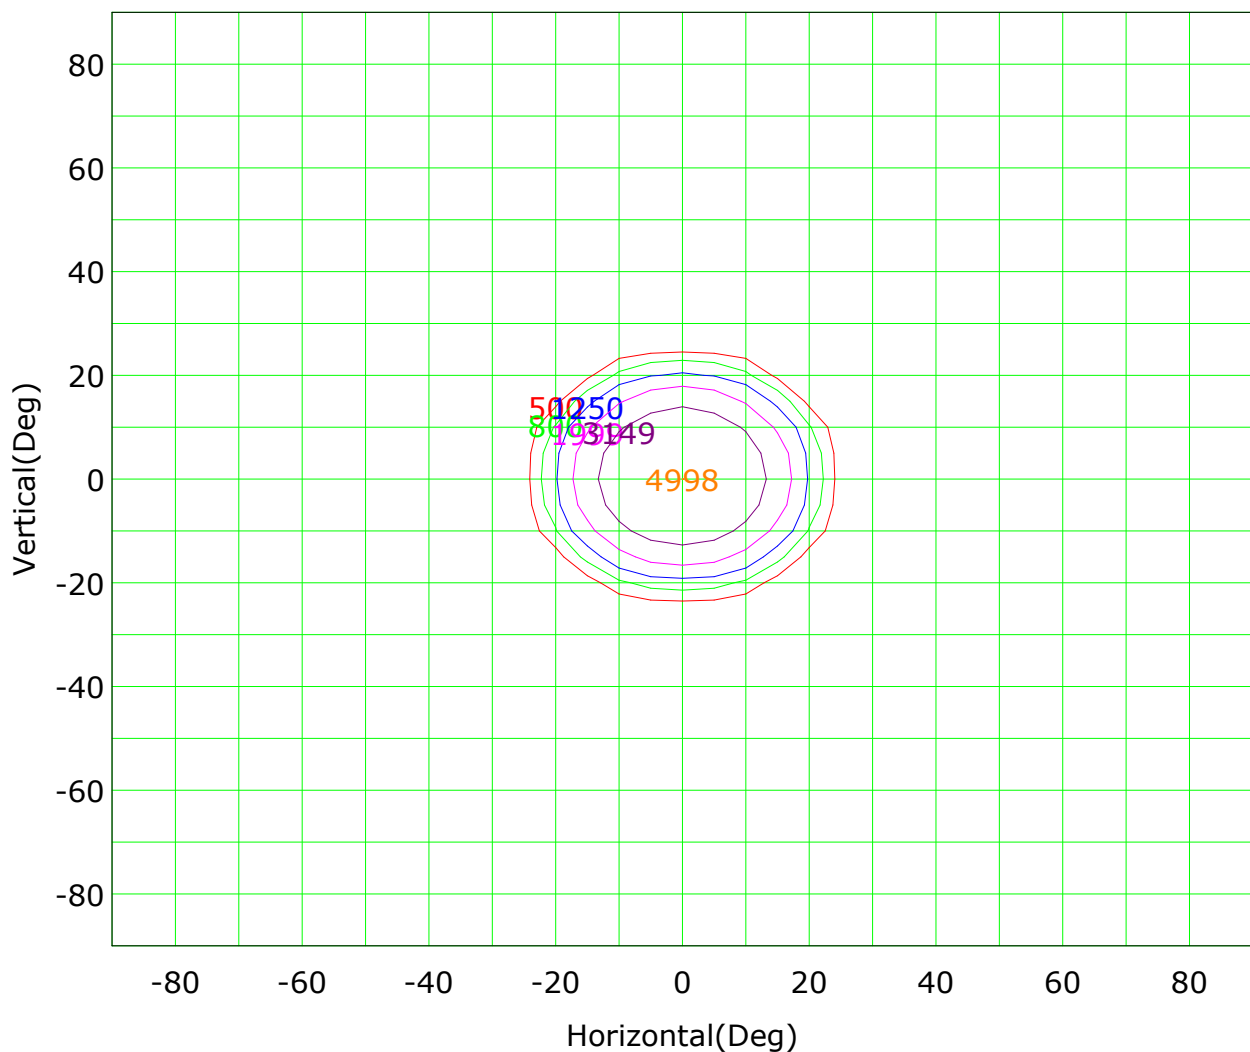

Imax (100%): 4998 cd

(10%): 500 cd	(16%): 800 cd
(25%): 1250 cd	(40%): 1999 cd
(63%): 3149 cd	(100%): 4998 cd

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0


Test Device: CHL-6E

Distance: 3.000 m

Humidity:

Inspector:

IsoLux Plot

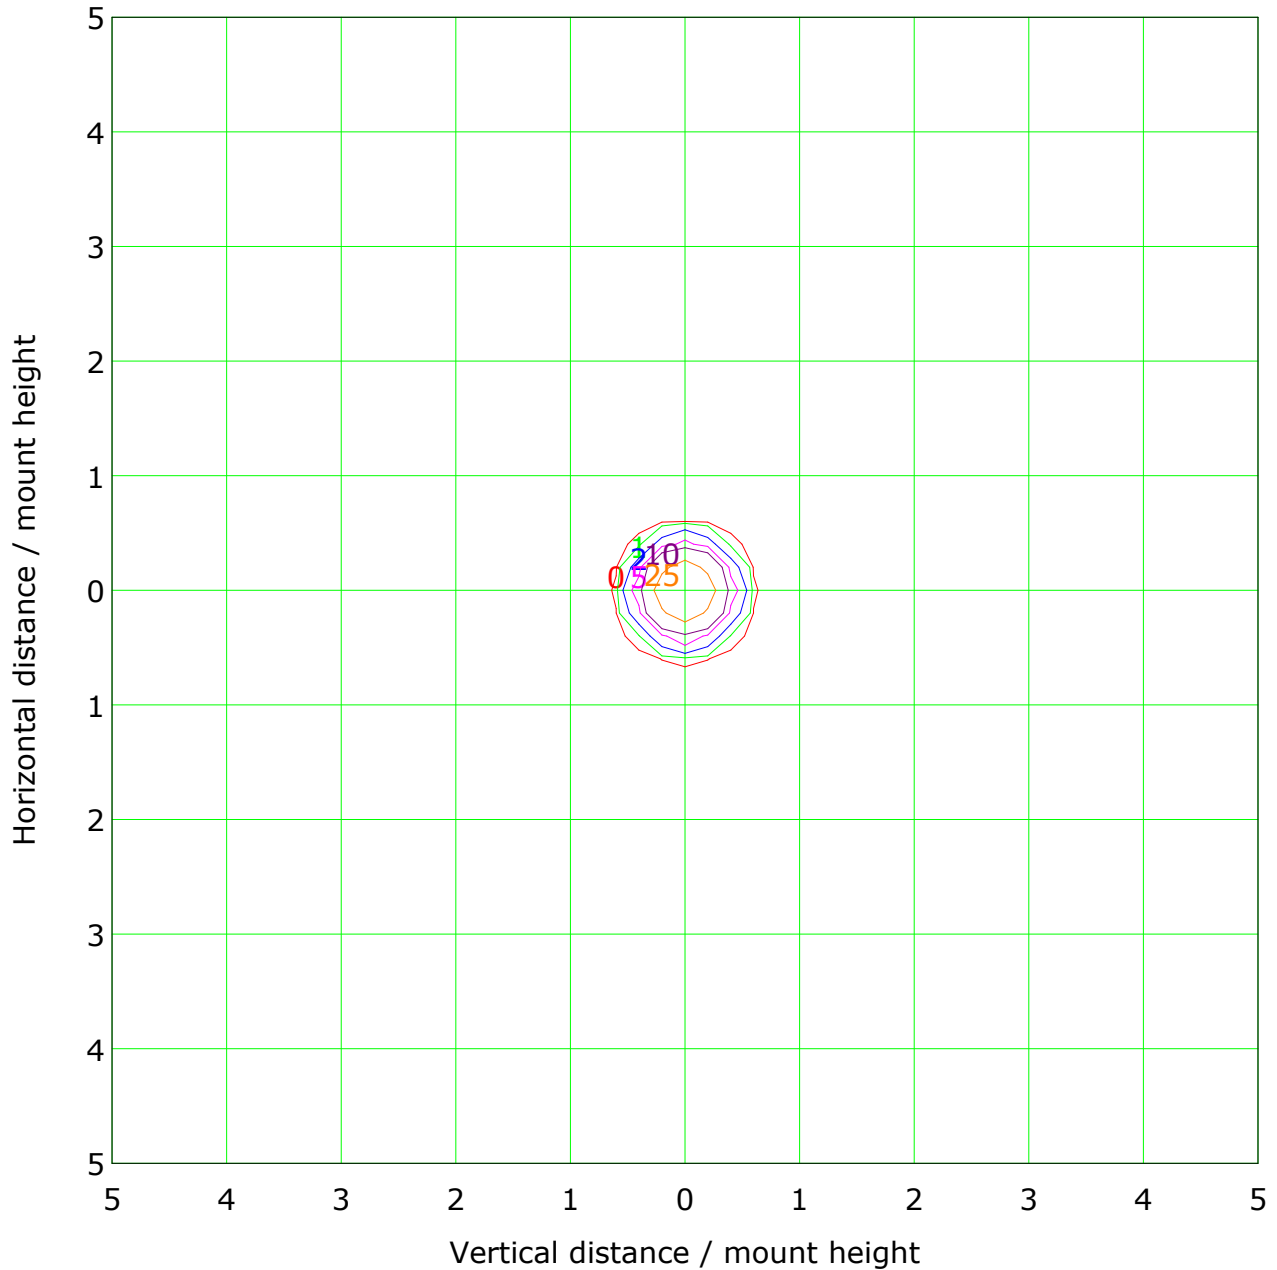

Mounting Height: 10m		Max Lux(100%): 50 lx	
(1%):	0 lx	(2%):	1 lx
(5%):	2 lx	(10%):	5 lx
(20%):	10 lx	(50%):	25 lx
(100%):	50 lx		

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0


Test Device: CHL-6E

Distance: 3.000 m

Humidity:

Inspector:

Illuminance at a Distance

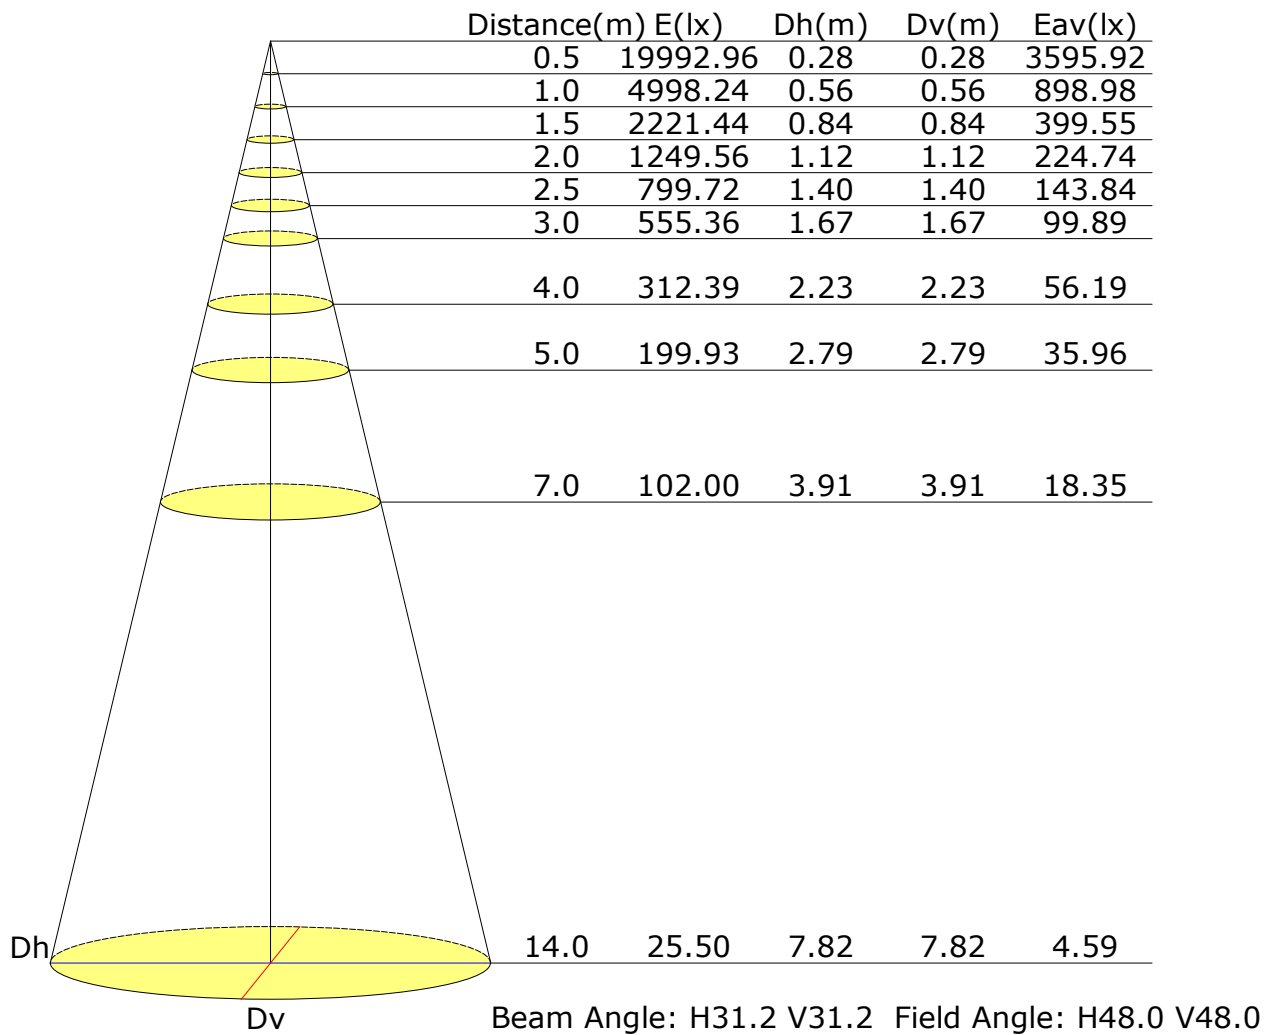

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0


Test Device: CHL-6E

Distance: 3.000 m

Humidity:

Inspector:

Vertical IsoLux Plot

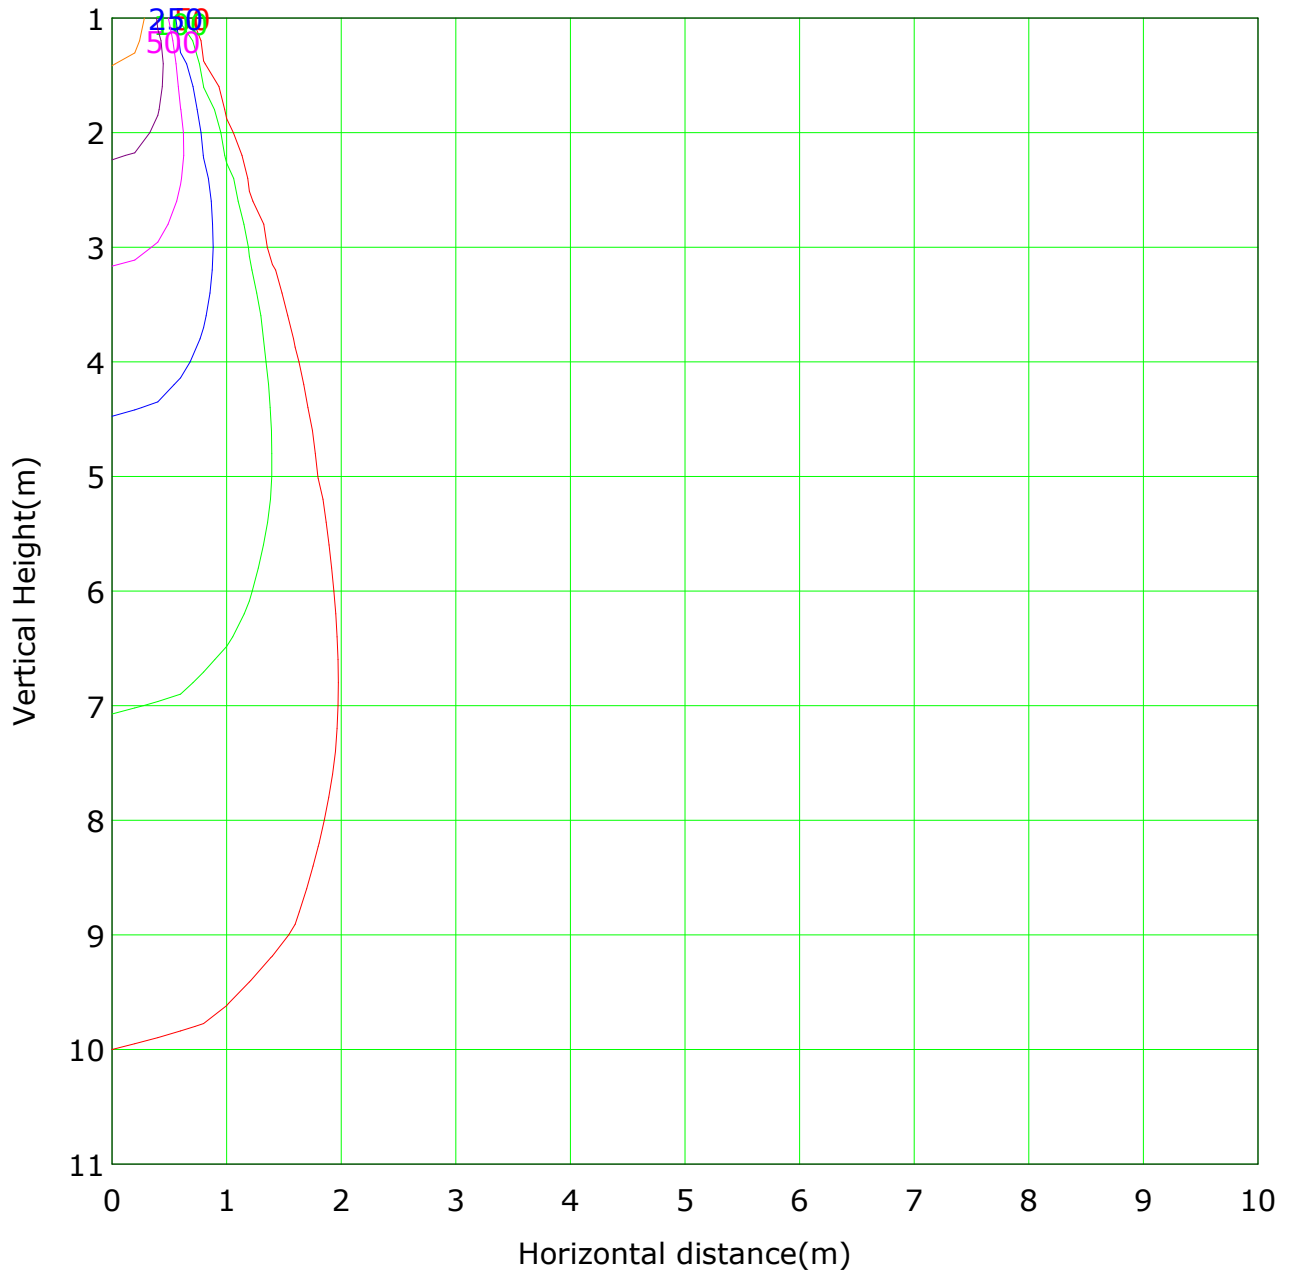

Lowest(m): 1m Highest(m): 11 Max Lux: 4998

(1%): 50 lx	(2%): 100 lx
(5%): 250 lx	(10%): 500 lx
(20%): 1000 lx	(50%): 2499 lx
(100%): 4998 lx	

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0


Test Device: CHL-6E

Distance: 3.000 m

Humidity:

Inspector:

The average illuminance effective figure

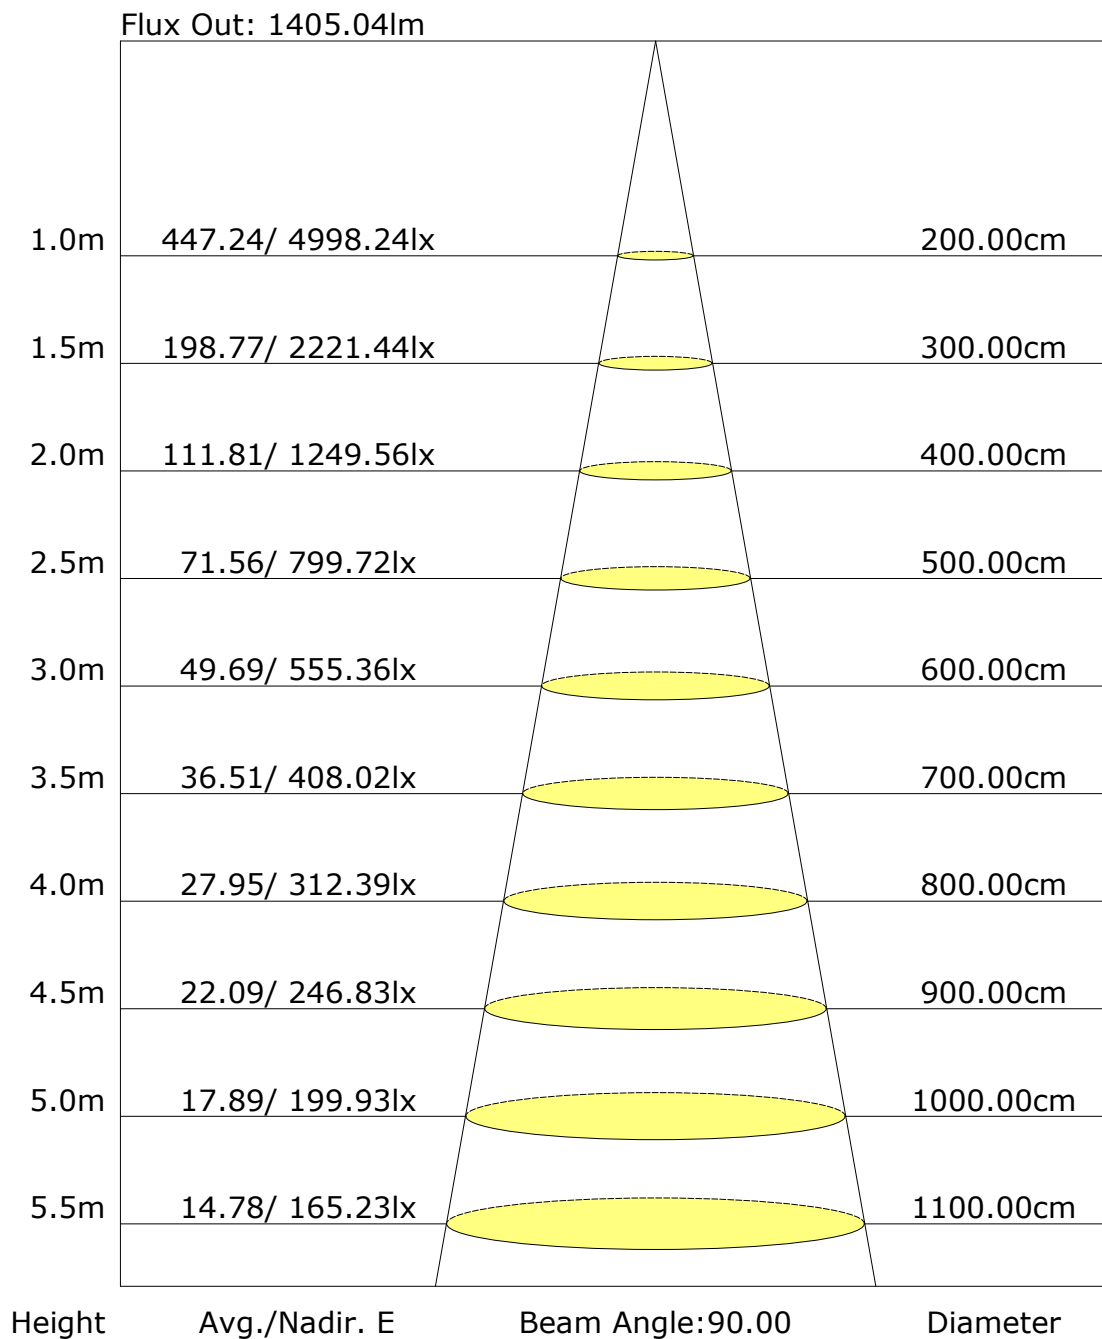

C Plane (°): 0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°): 0.0-90.0: 5.0
Test Device: CHL-6E
Distance: 3.000 m
Humidity:
Inspector:

Zonal Lumen

[illegible]

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0

Test Device: CHL-6E

Distance: 3.000 m

Humidity:

Inspector:

Candlepower Table

Unit: cd

[illegible]

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0

Test Device: CHL-6E

Distance: 3.000 m

Humidity:

Inspector: